

1163-1 Self-balancing Caster Series

ZQPU (milling brown) Wheel Diameter x Wheel Width 150 x 24mm


EAN

KS-11630602802013

Swivel Casters with Welded Caster Fork, Zinc-Plated finish
 Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
 Bearings—special Ball Bearings for reduced Rolling Resistance
 ZQPU Dual wheel, Ergonomic design designed for easier starting and turning

Wheel tread: Made of high-quality polyurethane
 Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

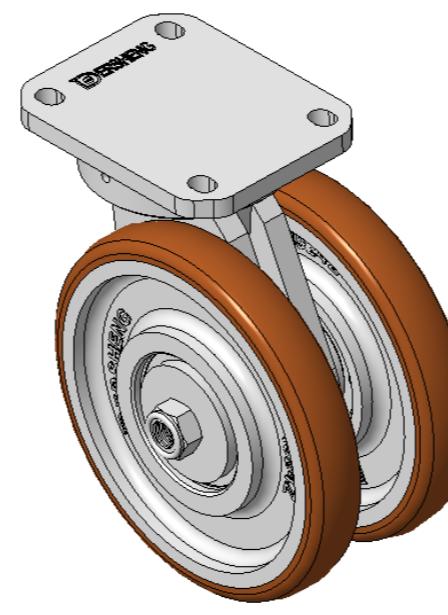

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	150mm
Wheel Width	79mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 110mm
Bolt Hole Spacing	110x75mm
Plate Hole	2213mm
Offset	35mm
Swivel Interference	236mm
Overall Height	180mm
Swivel Radius	118mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	380kgs
Load Capacity (Static)	570kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	9.59kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

Dimensions

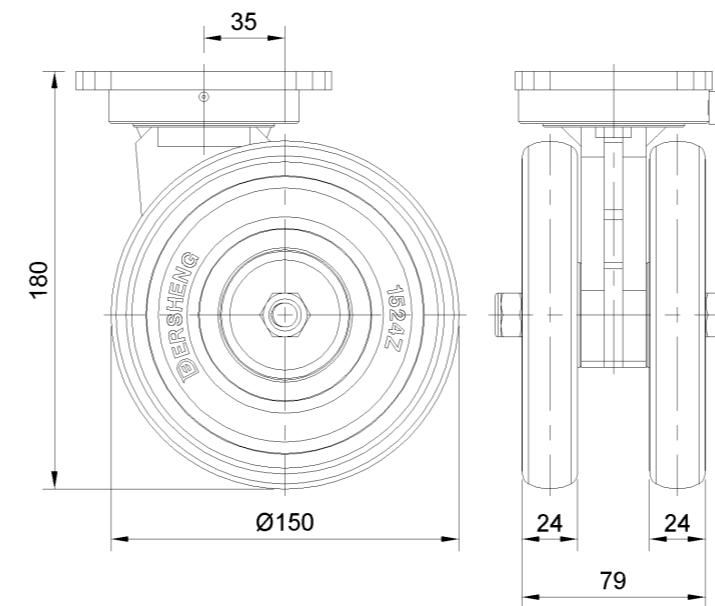

Mounting

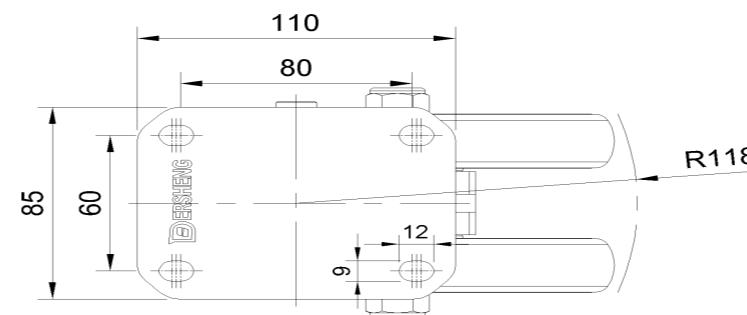

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com