

1165-2 Heavy Duty AMR/AGV-2 Caster Series

ZQPU (Milled Blue) Wheel Diameter x Wheel Width 50x 20 (41.5) mm


EAN

KS-11650202802053

Actual Casters, Welded Caster Fork, Zinc-Plated finish
 Base plate Mounting Type, 42.5x42.5mm Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron blue
 Bearings—specially designed precision balls to reduce Rolling Resistance
 ZQPU dual wheels, Ergonomic design designed for easier starting and turning

Wheel tread: Made of high-quality polyurethane
 Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

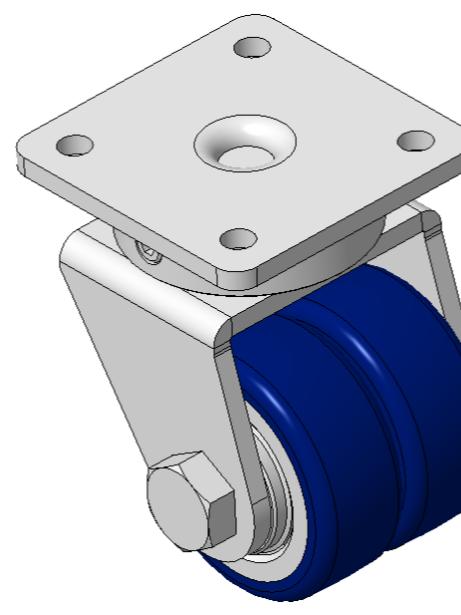

Picture may differ from original product

Technical Data


 Imperial Metric

Wheel Diameter	2 "
Wheel Width	1-11/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	2-7/16 " x 2-7/16 "
Bolt Hole Spacing	1-11/16" x 1-11/16"
Plate Hole	1/4 "
Offset	5/8 "
Swivel Interference	3-5/8 "
Overall Height	3-1/8 "
Swivel Radius	1-7/8 "
Hardness Of Tread	87±5° Shore A
Load Capacity (Dynamic)	154lbs
Load Capacity (Static)	231lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

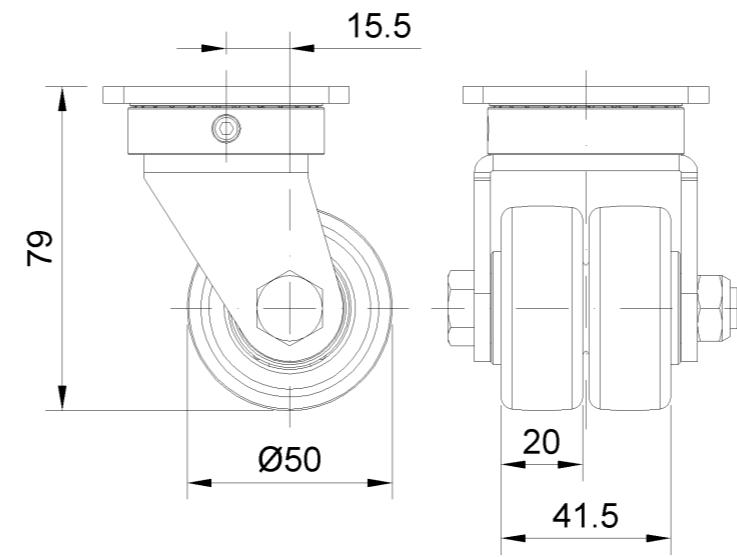

Mounting

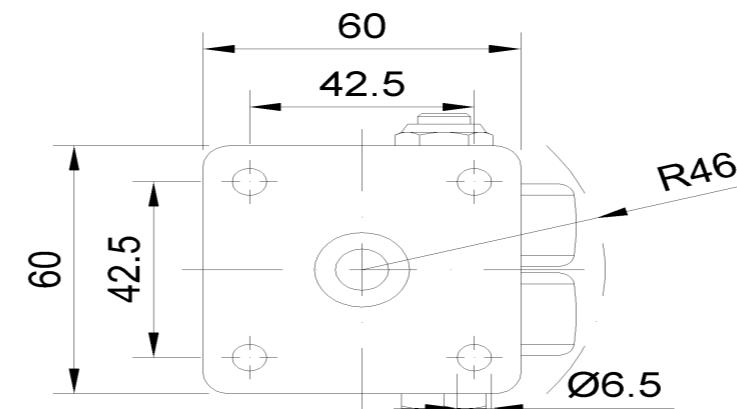

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com