

## 1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series




AQPU (Grey round) Wheel Diameter x Wheel Width 75 x 30mm

EAN

KS-11650303601033

Rigid Caster E-Coat Finish, Mounting Type - Top Plate, 75x45 Bolt Hole Spacing Aluminum core, High Quality Polyurethane tread Aluminum gray, Bearing—Ball Bearing

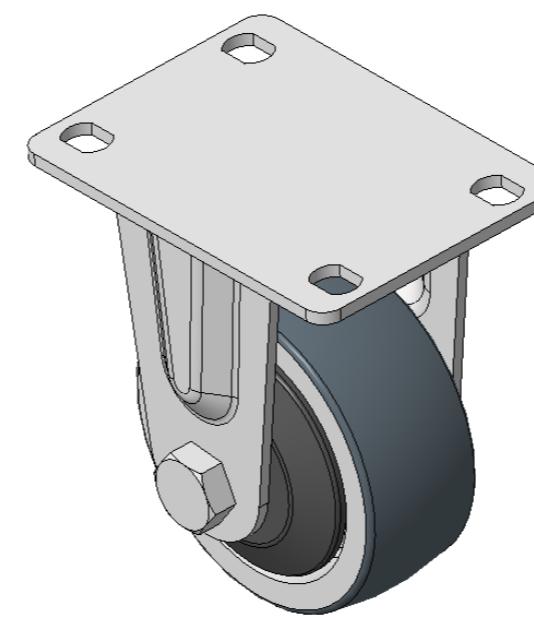

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	75mm
Wheel Width	30mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	92 x 68mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	11 x 8.6mm
Overall Height	102.5mm
Hardness Of Tread	77±5° Shore A
Load Capacity (Dynamic)	150kgs
Load Capacity (Static)	225kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.98kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

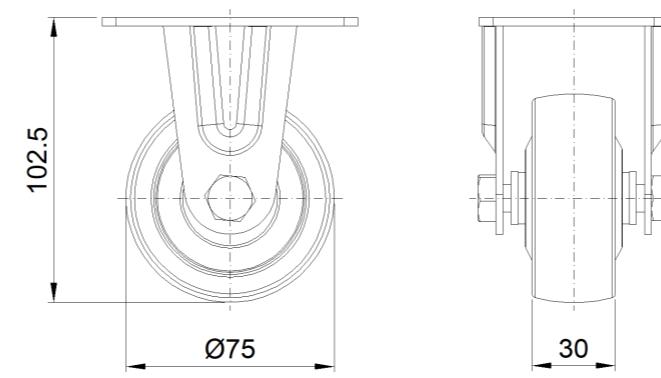

## Mounting

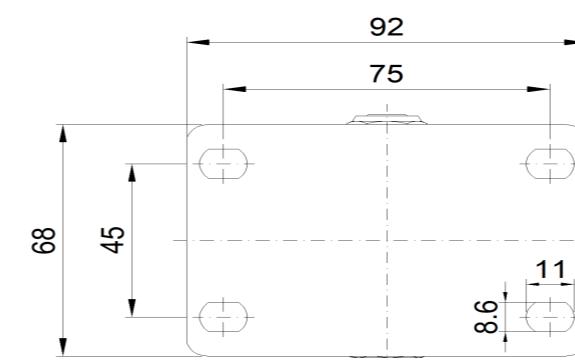

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com