

## 1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series




AQPU (Grey round) Wheel Diameter x Wheel Width 75 x 30mm

EAN

KS-11650303601033

Rigid Caster E-Coat Finish, Mounting Type - Top Plate, 75x45 Bolt Hole Spacing Aluminum core, High Quality Polyurethane tread Aluminum gray, Bearing—Ball Bearing

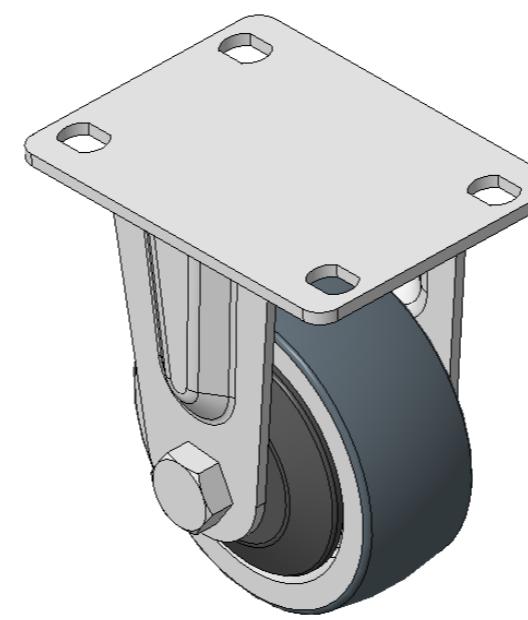

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter

3 "

Wheel Width

1-3/16 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

3-11/16 " x 2-11/16 "

Bolt Hole Spacing

3 " x 1-13/16 "

Plate Hole

3/8 " x 3/8 "

Overall Height

4-1/16 "

Hardness Of Tread

77±5° Shore A

Load Capacity (Dynamic)

331lbs

Load Capacity (Static)

496lbs

Temperature

-4°F to +158°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

2.2lbs

Standard

ISO22883

## Advantages at a glance

Rolling Resistance




Operating Noise




Floor Surface Preservation



## Dimensions

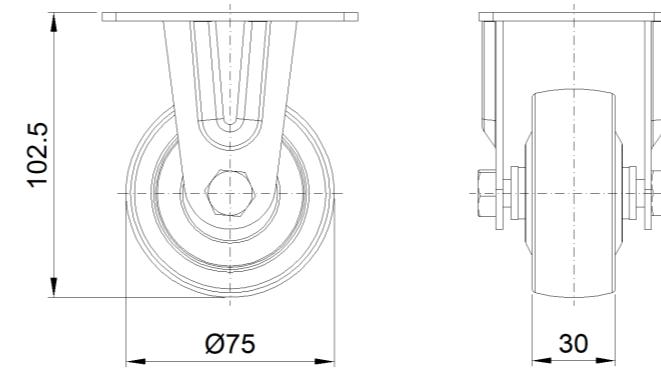

## Mounting

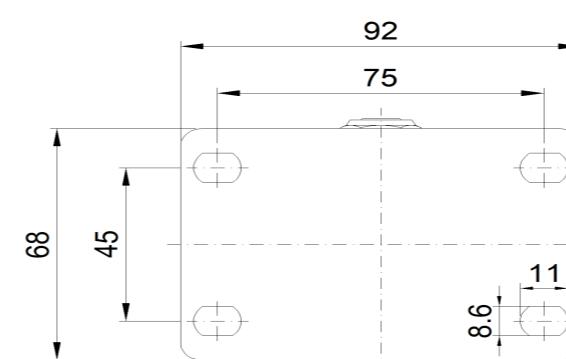

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com