

1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series



AQPU (Grey round) Wheel Diameter x Wheel Width 75 x 30mm


EAN

KS-11650303602013

Swivel Caster with Welded Caster Fork and electroplated finish
 Mounting Type - Top Plate, 75x45 Bolt Hole Spacing
 Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron gray
 Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane
 Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

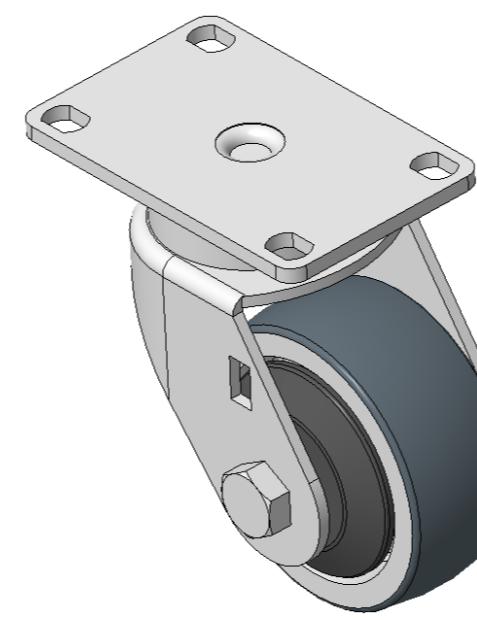

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	3 "
Wheel Width	1-3/16 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	3-11/16 " x 2-7/16 "
Bolt Hole Spacing	3 " x 1-13/16 "
Plate Hole	1/2 " x 23/64 "
Offset	1-1/2 "
Swivel Interference	8-1/16 "
Overall Height	5 "
Swivel Radius	4-1/16 "
Hardness Of Tread	77±5° Shore A
Load Capacity (Dynamic)	331lbs
Load Capacity (Static)	496lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.7lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

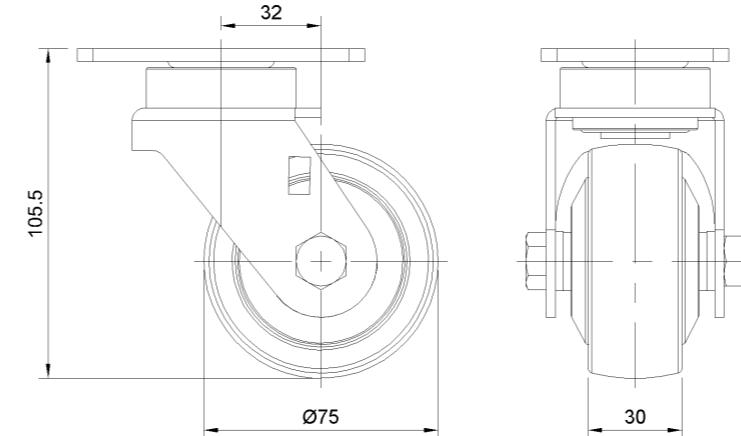

Mounting

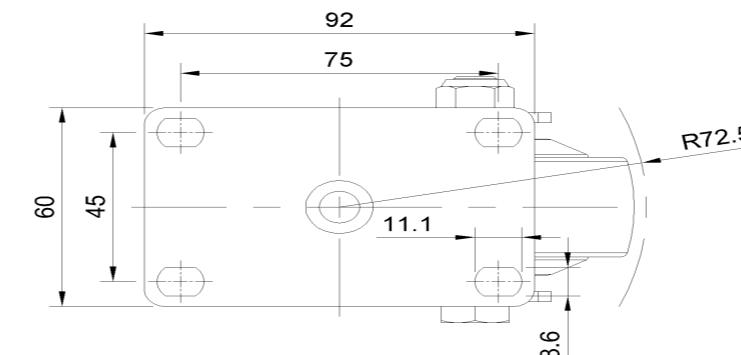

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com