

1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series




Anti-static ZQPU (milling black) Wheel Diameter x Wheel Width 75 x 20 (41.5) mm

EAN

KS-11650303801733

Rigid Caster with Welded Caster Fork E-Coat Finish, Mounting Type - Top Plate, 75x45 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron black Bearing—special Ball Bearing for reduced Rolling Resistance ZQPU Dual Wheels, Ergonomic design for easier starting and turning

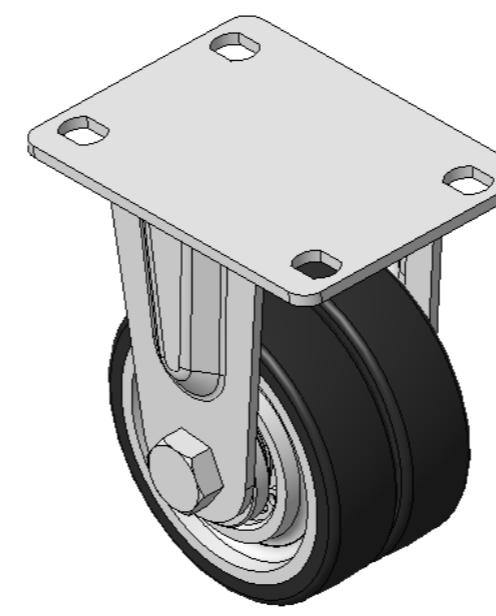

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter

3 "

Wheel Width

1-11/16 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

3-11/16 " x 2-11/16 "

Bolt Hole Spacing

3 " x 1-13/16 "

Plate Hole

3/8 " x 3/8 "

Overall Height

4-3/16 "

Hardness Of Tread

85±5° Shore A

Load Capacity (Dynamic)

331lbs

Load Capacity (Static)

496lbs

Temperature

-4°F to +158°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

Y 10^6/~10^9/02

Weight

3.2lbs

Standard

ISO22883

Advantages at a glance

Rolling Resistance




Operating Noise




Floor Surface Preservation



Dimensions

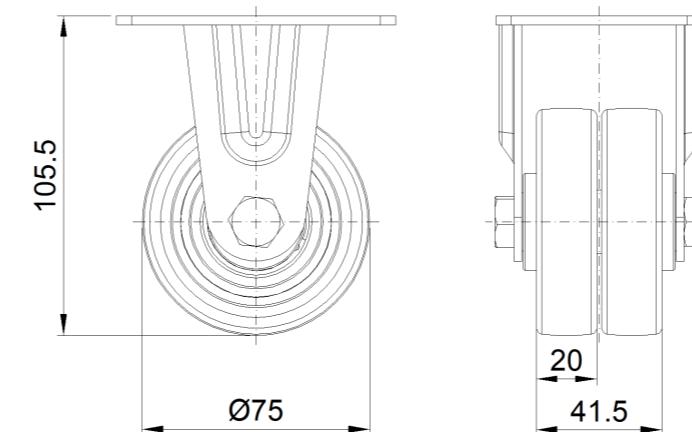

Mounting

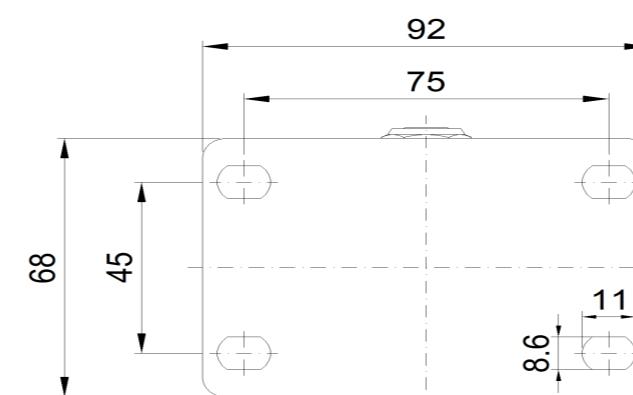

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com