

1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series



Anti-static ZQPU (milling black) Wheel Diameter x Wheel Width 75 x 20 (41.5) mm


EAN

KS-11650303802733

Swivel Casters, Welded Caster Fork, electroplated finish  
Mounting Type - Top Plate, 75x45 Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron black Bearings—special Ball Bearings for reduced Rolling Resistance  
ZQPU dual wheels, Ergonomic design designally designed for easier starting and turning

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

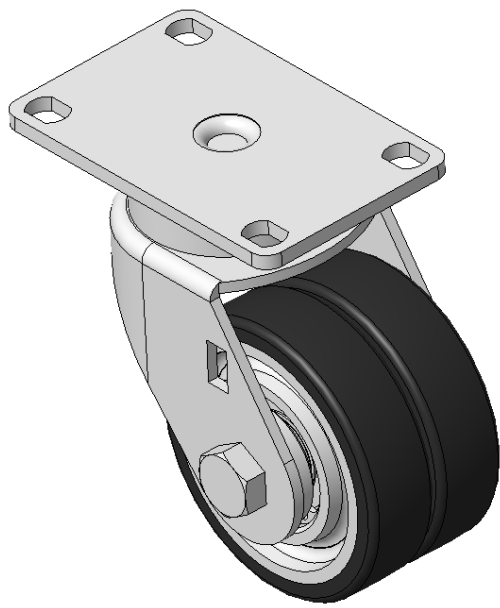

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 3 "                       |
| Wheel Width                                                            | 1-11/16 "                 |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 3-11/16 " x 2-7/16 "      |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "           |
| Plate Hole                                                             | 3/8 " x 3/8 "             |
| Offset                                                                 | 1-5/16 "                  |
| Swivel Interference                                                    | 5-13/16 "                 |
| Overall Height                                                         | 4-3/16 "                  |
| Swivel Radius                                                          | 2-7/8 "                   |
| Hardness Of Tread                                                      | 77±5° Shore A             |
| Load Capacity (Dynamic)                                                | 331lbs                    |
| Load Capacity (Static)                                                 | 496lbs                    |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | Y 10^6/~10^9/Ω            |
| Weight                                                                 | 3.9lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

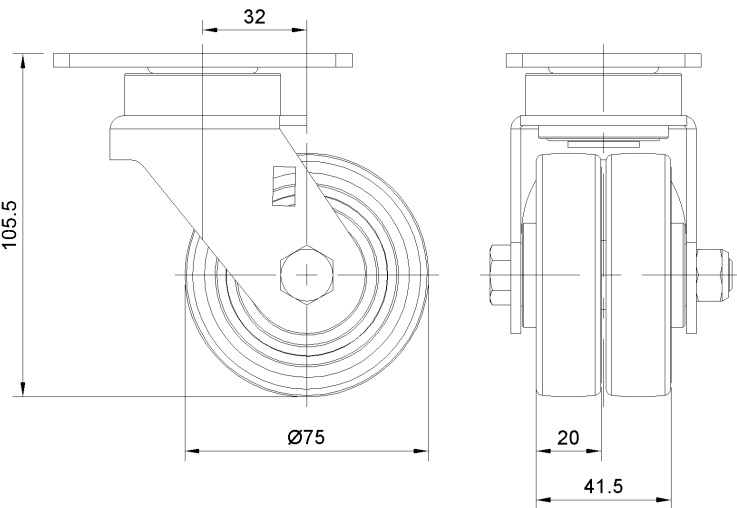

Mounting

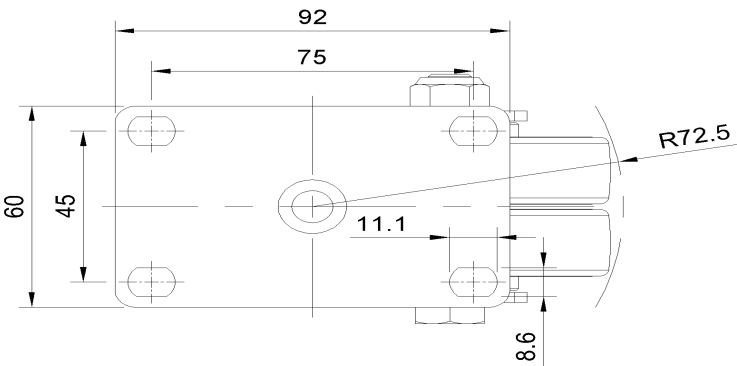

\* For any deviation between metric and imperial spec, please refer to the metric spec.