


HPU (orange round) Wheel Diameter x Wheel Width 75 x 30 mm

EAN

KS-11650305752013

Swivel castor, Welded Caster Fork Surface spray zinc, Top Plate Mounting Type, Hole spacing 80 x 60 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron orange Bearing - Ball Bearing

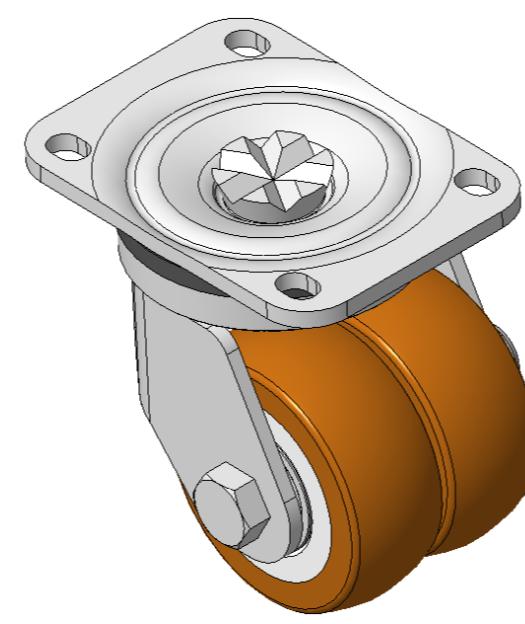

Wheel tread: Made of high quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter

3 "

Wheel Width

2-1/2 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-3/8 " x 3-3/16 "

Bolt Hole Spacing

3-3/16 " x 2-7/16 "

Plate Hole

1/2 " x 23/64 "

Offset

1 "

Swivel Interference

6 "

Overall Height

4-1/4 "

Swivel Radius

3 "

Hardness Of Tread

92±5° Shore A

Load Capacity (Dynamic)

661lbs

Load Capacity (Static)

992lbs

Temperature

-4°F to +158°F

Fork Type

Swivel Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

4.4lbs

Standard

ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ●


Operating Noise ● ● ● ○

Floor Surface Preservation ● ● ● ●

Dimensions

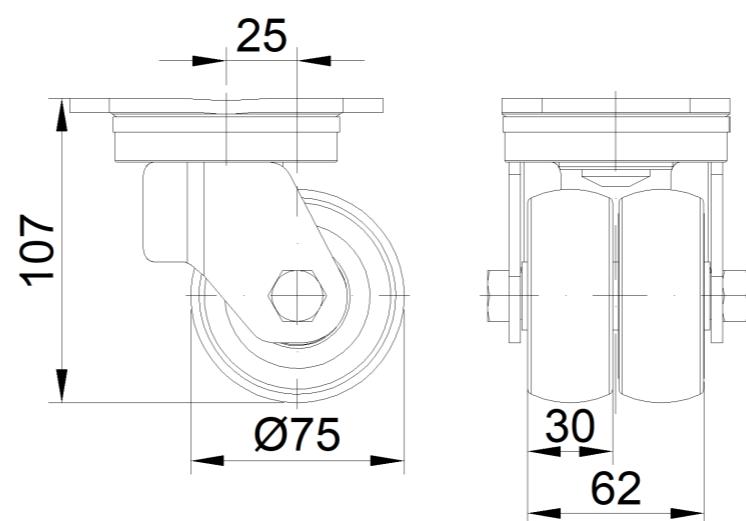

Mounting

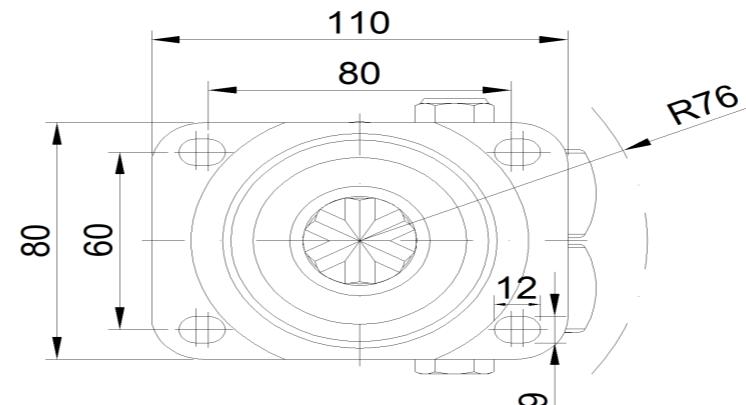

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com