

Anti-static HPU (black round) Wheel Diameter x Wheel Width 72 x 30 mm

EAN

KS-11650305752213



Portable Casters

 Electroplated surface, Mounting Type - Top Plate, 85x70mm Bolt Hole Spacing
 Aluminum wheel center, High Quality Polyurethane Wheel Tread
 Cast Iron black, Bearing—Ball Bearings

Wheel Tread: High-Quality Polyurethane

Wheel Center: Iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 72mm

Wheel Width 62mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 68mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 11 x 20mm

Offset 21.7mm

Swivel Interference 142mm

Overall Height 100mm

Swivel Radius 71mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 300kgs

Load Capacity (Static) 450kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static Y 10^6/~10^9/02

Weight 2.73kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • • ○

Floor Surface Preservation • • • •

Dimensions

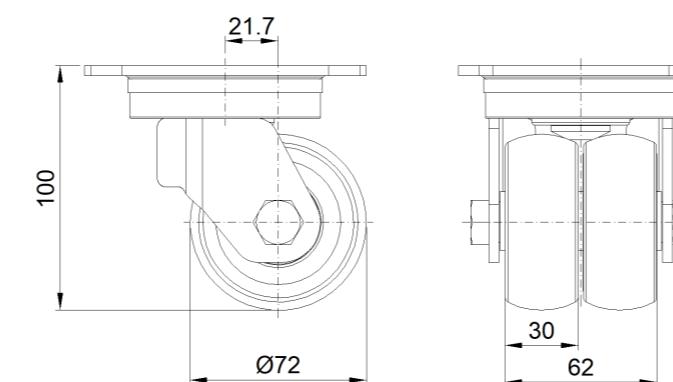

Mounting

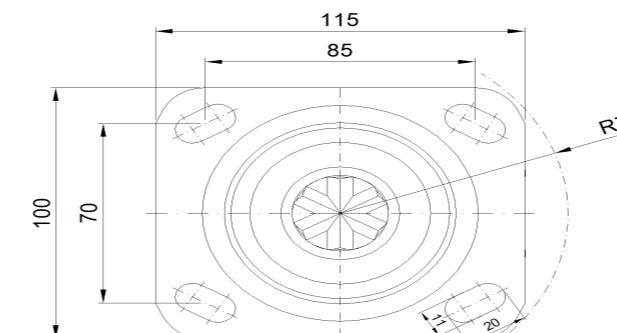

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com