

Anti-static HPU (black round) Wheel Diameter x Wheel Width 72 x 30 mm

EAN

KS-11650305752213



Portable Casters

 Electroplated surface, Mounting Type - Top Plate, 85x70mm Bolt Hole Spacing
 Aluminum wheel center, High Quality Polyurethane Wheel Tread
 Cast Iron black, Bearing—Ball Bearings

Wheel Tread: High-Quality Polyurethane

Wheel Center: Iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 2-7/8 "

Wheel Width 2-1/2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-11/16 " x 2-11/16 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 3/8 " x 13/16 "

Offset 7/8 "

Swivel Interference 5-5/8 "

Overall Height 4 "

Swivel Radius 2-13/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static Y 10^6/~10^9/02

Weight 6.0lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • • ○

Floor Surface Preservation • • • •

Dimensions

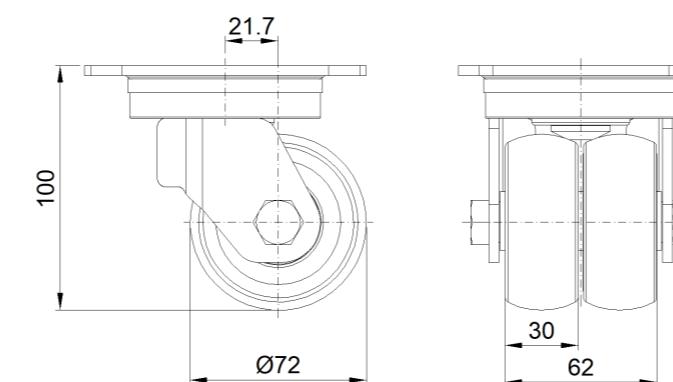

Mounting

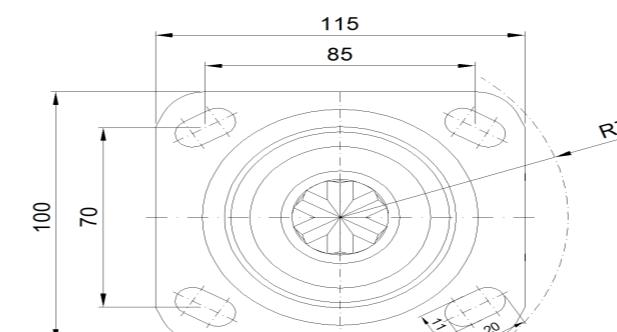

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com