

Anti-static HPU (black round) Wheel Diameter x Wheel Width 75 x 30 mm

EAN

KS-11650305752723

Swivel castor, Welded Caster Fork Surface spray zinc, Top Plate Mounting Type, Hole spacing 85 x 70 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron black Bearing - Ball Bearing, Anti-Static



Wheel tread: Made of high quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter

3 "

Wheel Width

2-1/2 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-3/8 " x 3-3/16 "

Bolt Hole Spacing

3-3/8 " x 2-3/4 "

Plate Hole

23/64 "

Offset

13/16 "

Swivel Interference

6 "

Overall Height

4-3/8 "

Swivel Radius

3 "

Hardness Of Tread

92±5° Shore A

Load Capacity (Dynamic)

661lbs

Load Capacity (Static)

992lbs

Temperature

-4°F to +158°F

Fork Type

Swivel Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

Y 10^6/~10^9/02

Weight

4.7lbs

Standard

ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ●


Operating Noise ● ● ● ○

Floor Surface Preservation ● ● ● ●

Dimensions

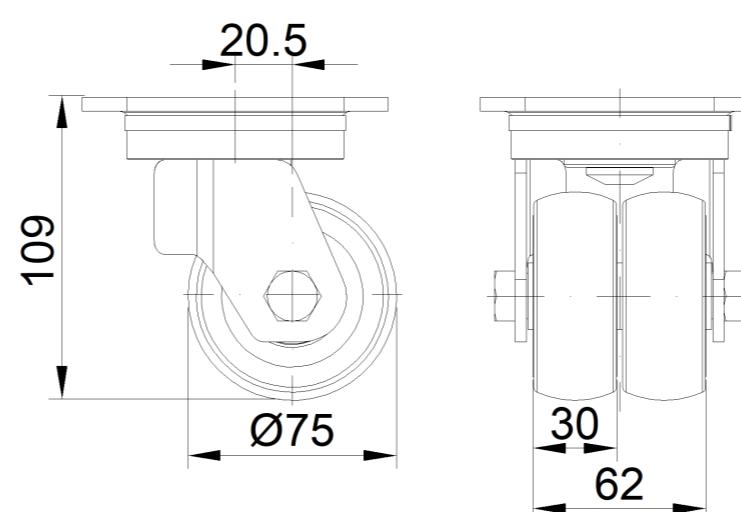

Mounting

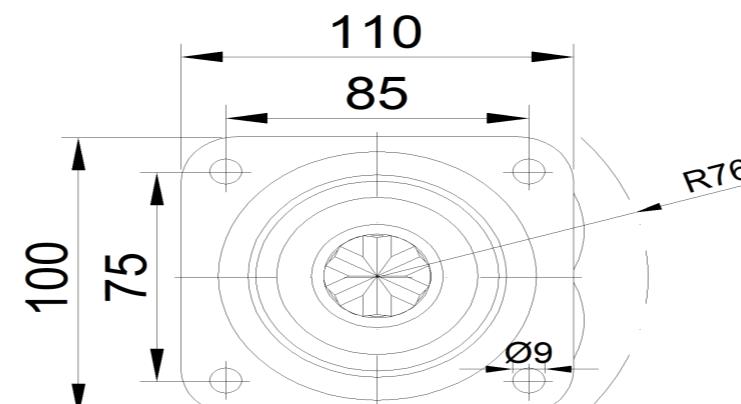

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com