

HPU (orange round) Wheel Diameter x Wheel Width 75 x 30 mm

EAN


KS-11650305752743

Swivel Caster, Welded Caster Fork Surface spray zinc, Mounting Type - Top Plate, Hole spacing 85 x 70 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron orange Bearing - Ball Bearing

Wheel tread: Made of high quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

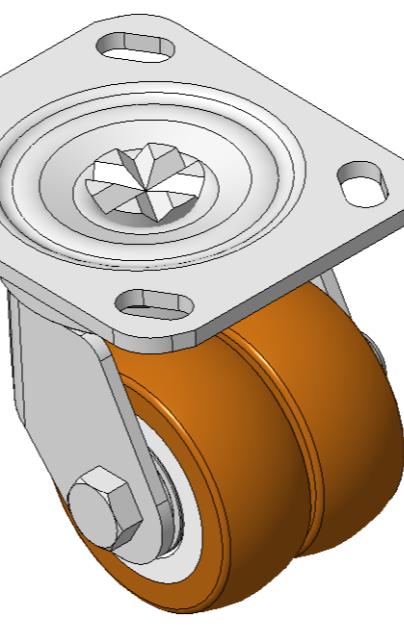

Picture may differ from original product

#### Technical Data

Imperial  Metric

Wheel Diameter 3 "

Wheel Width 2-1/2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/8 " x 3-3/16 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 1 "

Swivel Interference 6 "

Overall Height 4-1/4 "

Swivel Radius 3 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.5lbs

Standard ISO22883


#### Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • • ○

Floor Surface Preservation • • • •

#### Dimensions

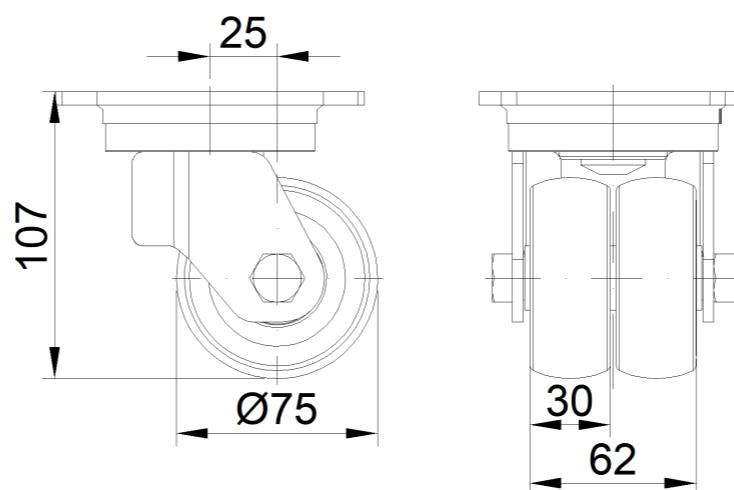

#### Mounting

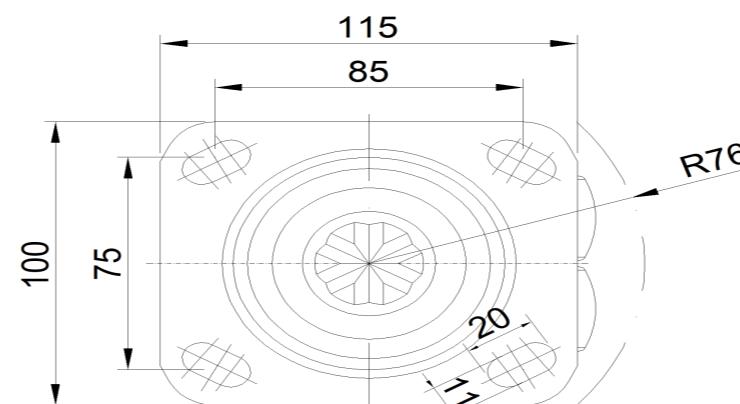

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com