

## 1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series




AQPU (blue round) Wheel Diameter x Wheel Width 100 x 36mm

EAN

KS-11650403602043

Swivel Caster with Riveted Fork and Stamping Fork—High-Quality holes E-Coat Finish, Mounting Type - Top Plate, 80 x 60 Bolt Hole Spacing Aluminum core, High Quality Polyurethane tread Blue, Bearing—Ball Bearing.

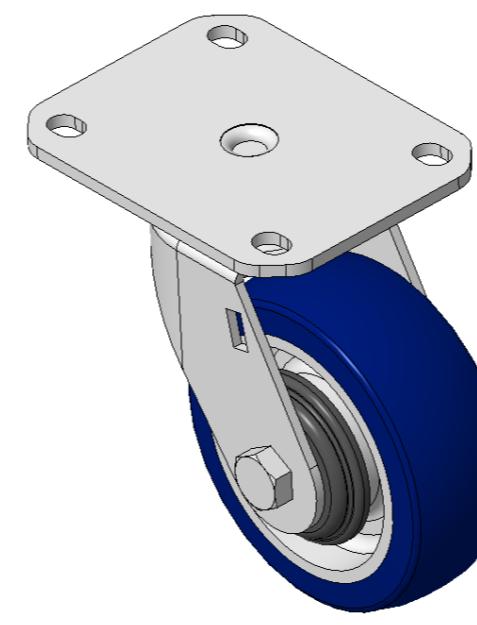

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 100mm

Wheel Width 36mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 110 x 85mm

Bolt Hole Spacing 80 x 60mm

Plate Hole 11.1 x 8.6mm

Offset 35mm

Swivel Interference 172mm

Overall Height 130mm

Swivel Radius 86mm

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 200kgs

Load Capacity (Static) 300kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.11kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

## Dimensions

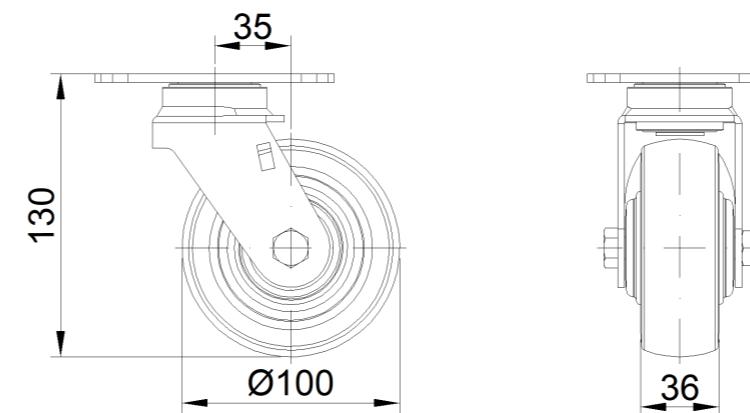

## Mounting

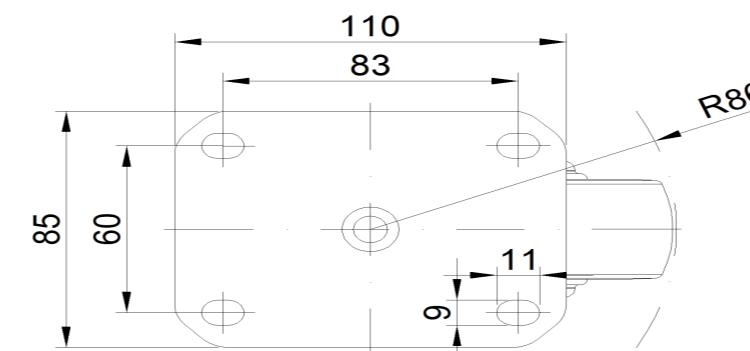

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com