



AMR/AGV- 7 Shock Absorbing Caster (Medium Duty)

AQPU (grey round) Wheel Diameter × Wheel Width 100 x 31mm

EAN


KS-11650407602123

Spring-loaded Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 75x45 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, aluminum gray Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

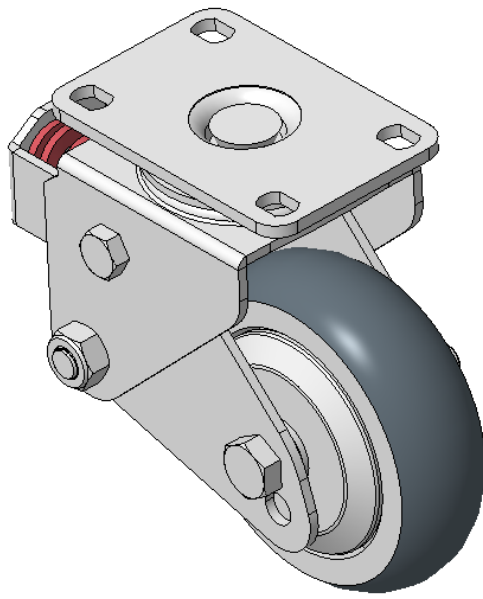

Picture may differ from original product

Technical Data

☒ Imperial ☐ Metric

Wheel Diameter 4"

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-13/16 " x 2-9/16 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole $1/2'' \times 23/64''$

Offset 1-5/16"

Swivel Interference 6-13/16"

Overall Height 5-7/16 "

Swivel Radius 3-7/16"

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic)	397lbs
-------------------------	--------

Load Capacity (Static)	595lbs
------------------------	--------

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless	N/A
-----------	-----

Electrical Conductivity	N/A
-------------------------	-----

Anti-Static	N/A
-------------	-----

Weight 5.6lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ● ●


Operating Noise ● ● ● ● ●

Floor Surface Preservation ● ● ● ● ●

Dimensions

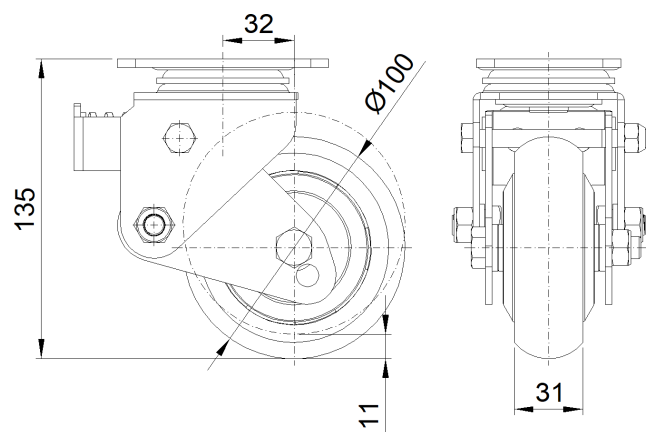

Mounting

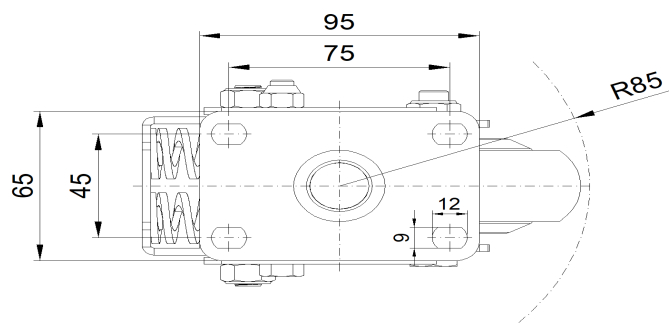

* For any deviation between metric and imperial spec, please refer to the metric spec.