

1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series




Resolute (blue gray) Wheel Diameter x Wheel Width 125 x 31mm

EAN

KS-11650503452113

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing E-Coat Finish, Top Plate (3T) Mounting Type, 80 x 60 Bolt Hole Spacing High-quality Impact Resistance Polypropylene core, High-Quality Thermoplastic Rubber (TPR) tread Blue-gray color, Bearing—Ball Bearing.

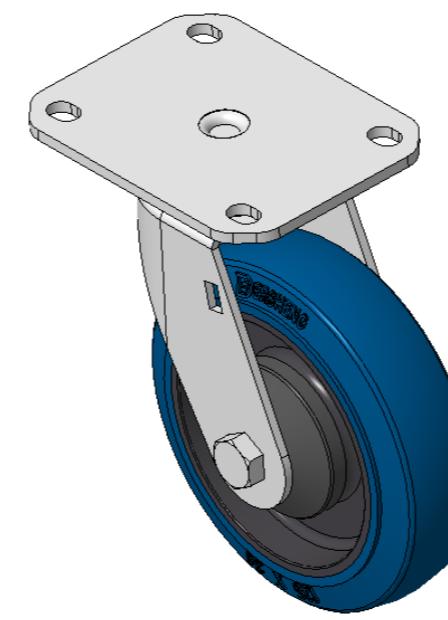

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 125mm |
| Wheel Width | 36mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 110 x 85mm |
| Bolt Hole Spacing | 80 x 60mm |
| Plate Hole | 11.1 x 8.6mm |
| Offset | 35mm |
| Swivel Interference | 198mm |
| Overall Height | 158mm |
| Swivel Radius | 99mm |
| Hardness Of Tread | 85±5° Shore A |
| Load Capacity (Dynamic) | 130kgs |
| Load Capacity (Static) | 195kgs |
| Temperature | -20°C to +80°C |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.43kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|---------|
| Rolling Resistance | • • • • |
| Operating Noise | • • • • |
| Floor Surface Preservation | • • • • |

Dimensions

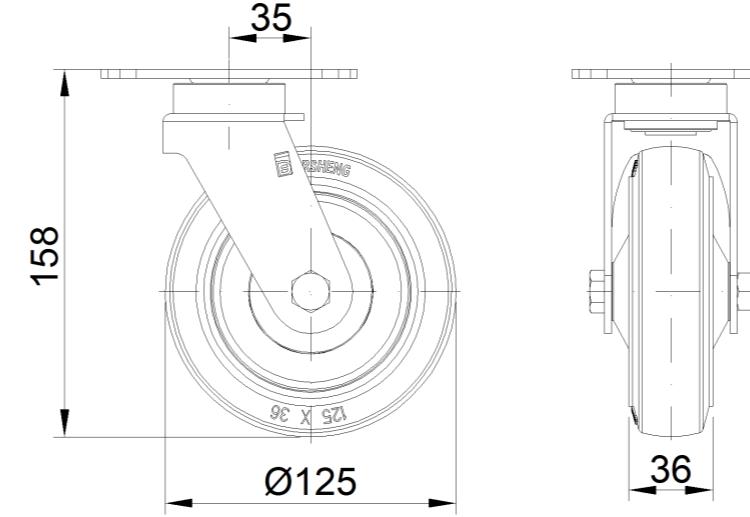

Mounting

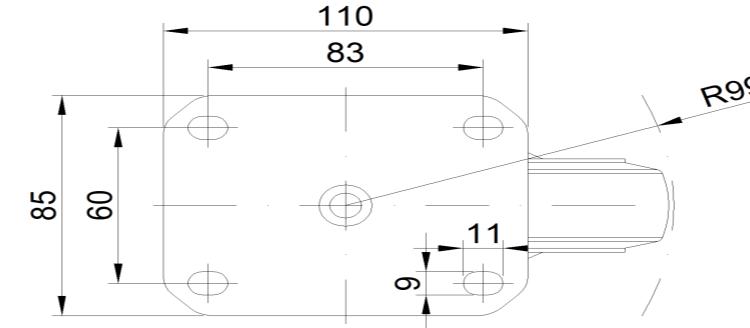

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com