

## 1165-3 AMR/AGV-3 Double Precision Ball Bearing Caster (Medium Duty) Series




AQPU (grey) Wheel Diameter x Wheel Width 125 x 31mm

EAN

KS-11650503602023

Swivel Caster with Riveted Fork and Stamping Fork—High-Quality holes E-Coat Finish, Mounting Type - Top Plate, 75x45 Bolt Hole Spacing Aluminum core, High Quality Polyurethane tread Gray, Bearing—Ball Bearing.

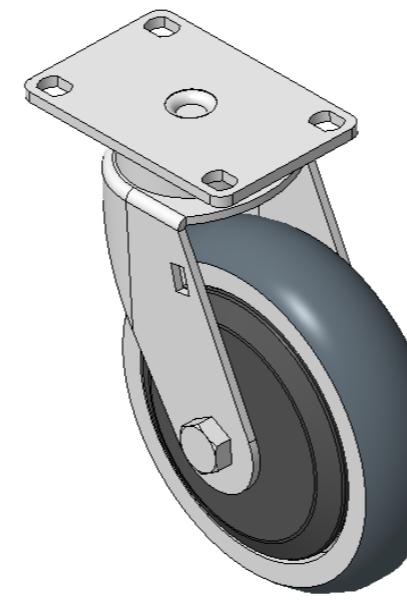

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	125mm
Wheel Width	31mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	92 x 60mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	11.1 x 8.6mm
Offset	35mm
Swivel Interference	198mm
Overall Height	158mm
Swivel Radius	99mm
Hardness Of Tread	87±5° Shore A
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	300kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.45kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

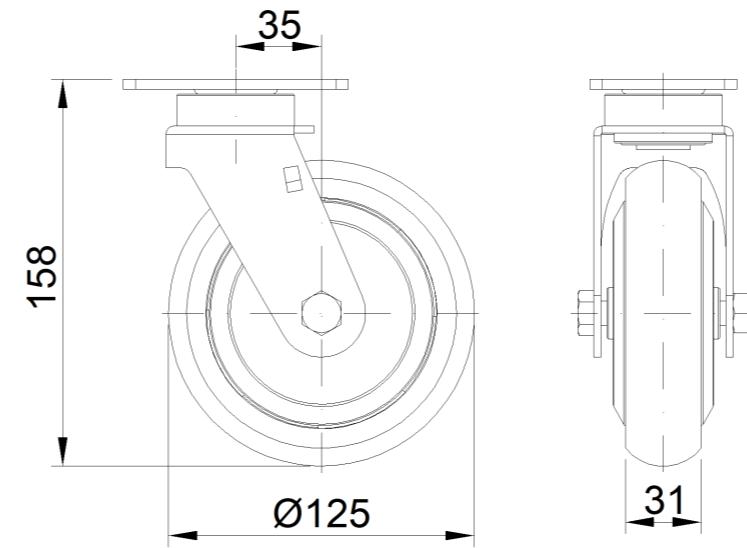

## Mounting

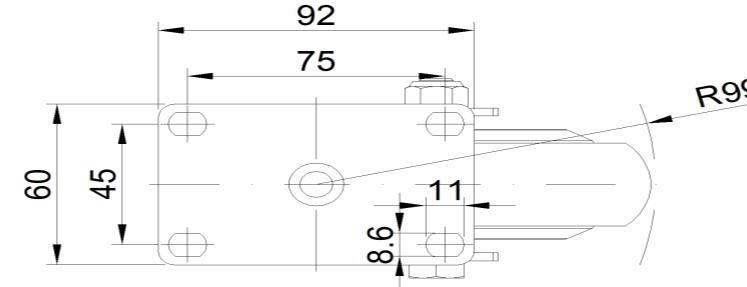

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com