1165-4 1165 Series — AMR/AGV-4 Single Precision Ball Bearing Caster (Medium Duty)Series

Dersheng Casters Keep Rolling

Resolute (pearl dark gray) Wheel Diameter x Wheel Width 125 x 24.5mm

EAN

KS-11650504452313

Swivel Caster, Welded Caster Fork, electroplated finish
Mounting Type - Top Plate, 75x45 Bolt Hole Spacing
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Cast Iron dark gray, Bearing—Ball Bearings

Wheel surface: Thermoplastic elastomer (TPR) wheel surface

Wheel Center: Polypropylene wheel core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Plate Size

Fork Type

Standard

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 24.5mm

Wheel Bearing Wheels With Ball Bearings

92 x 66mm

Swivel Caster

ISO22883

Bolt Hole Spacing 75 x 45mm

Plate Hole 11.1 x 8.6mm

Offset 37mm

Swivel Interference 203mm

Overall Height 150mm

Swivel Radius 101.5mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 130kgs

Load Capacity (Static) 195kgs

Temperature -20°C to +60°C

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight2.22kgs


Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions

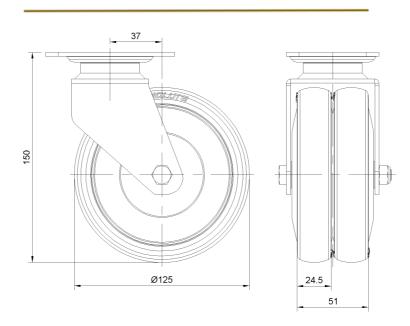

Mounting

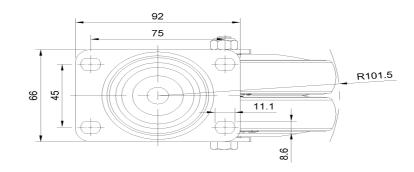

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.