



AMR/AGV- 7 Shock Absorbing Caster (Medium Duty)

W Resolute (black, dark gray) Wheel Diameter × Wheel Width 125 x 38mm


EAN

KS-11650507452213

Spring-loaded Caster with Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 75x45 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread Pearl-finish dark gray, Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

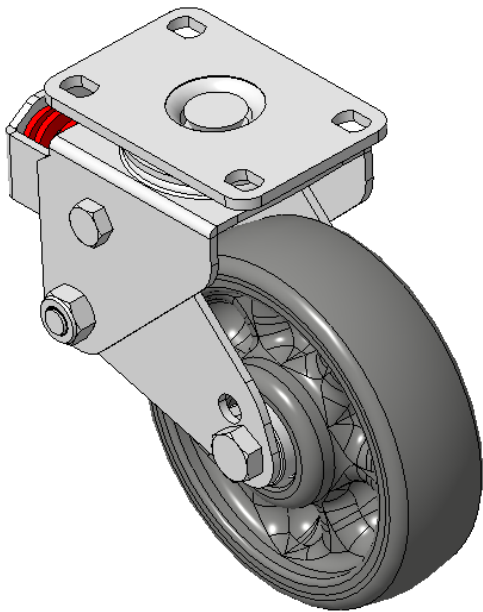

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 5 "                       |
| Wheel Width                                                            | 1-1/2 "                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 3-13/16 " x 2-9/16 "      |
| Bolt Hole Spacing                                                      | 3 " x 1-13/16 "           |
| Plate Hole                                                             | 1/2 " x 23/64 "           |
| Offset                                                                 | 1-1/2 "                   |
| Swivel Interference                                                    | 8-3/16 "                  |
| Overall Height                                                         | 6-3/8 "                   |
| Swivel Radius                                                          | 4-1/16 "                  |
| Hardness Of Tread                                                      | 72±5° Shore A             |
| Load Capacity (Dynamic)                                                | 276lbs                    |
| Load Capacity (Static)                                                 | 413lbs                    |
| Temperature                                                            | -4°F to +140°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 3.7lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

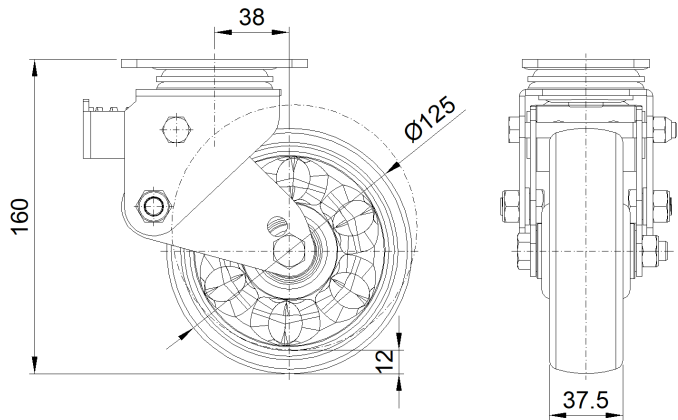

Mounting

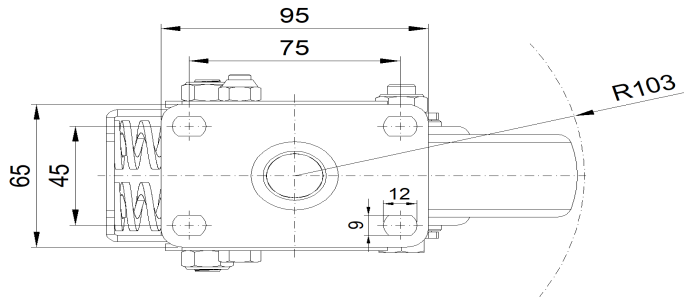

\* For any deviation between metric and imperial spec, please refer to the metric spec.