


1165-2 Heavy Duty AMR/AGV-2 Caster Series

MC Nylon (beige) Wheel Diameter x Wheel Width 80 x 35mm

EAN

KS-11652302072023

Swivel Caster, Welded Caster Fork Zinc-Plated, Mounting Type - Top Plate, 80 x 60 Bolt Hole Spacing Reinforced Polypropylene, off-white wheel tread Bearing - Ball Bearing

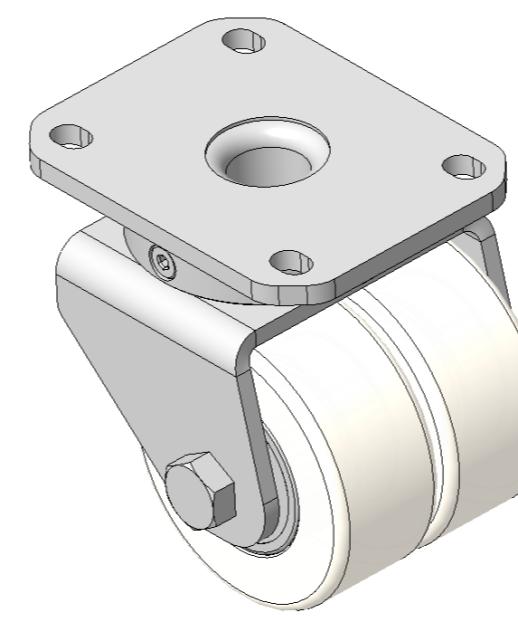

Wheel tread: Made of thermoplastic

Wheel Center: Thermoplastic wheel core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter 80mm

Wheel Width 73mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 110 x 85mm

Bolt Hole Spacing 80 x 60mm

Plate Hole 12 x 9mm

Offset 23mm

Swivel Interference 145mm

Overall Height 110mm

Swivel Radius 72.5mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +80°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.11kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • o o o

Floor Surface Preservation • • o o o

Dimensions

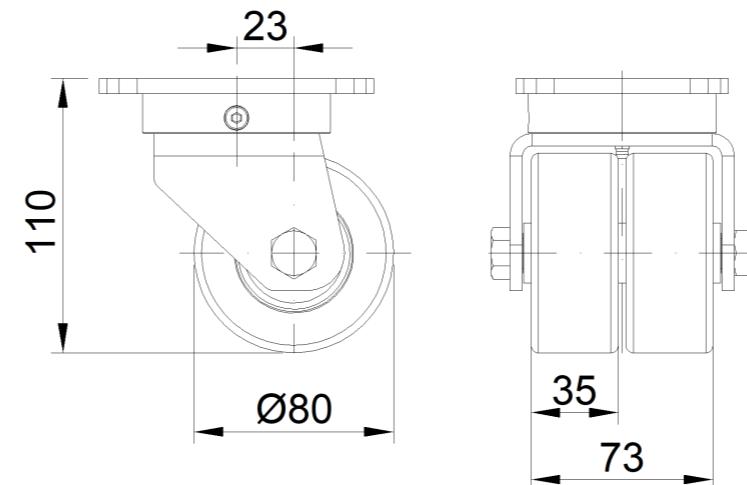

Mounting

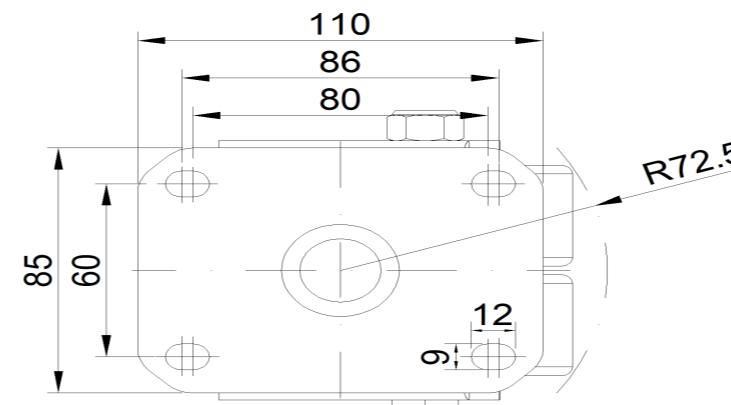

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com