


1165-2 Heavy Duty AMR/AGV-2 Caster Series

QPU(brown) Wheel Diameter x Wheel Width 75 x 31mm

EAN

KS-11652302532023

Swivel Caster with Welded Caster Fork Zinc-Plated, Mounting Type - Top Plate, 80x60 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread Iron brown, Bearing—Ball Bearing

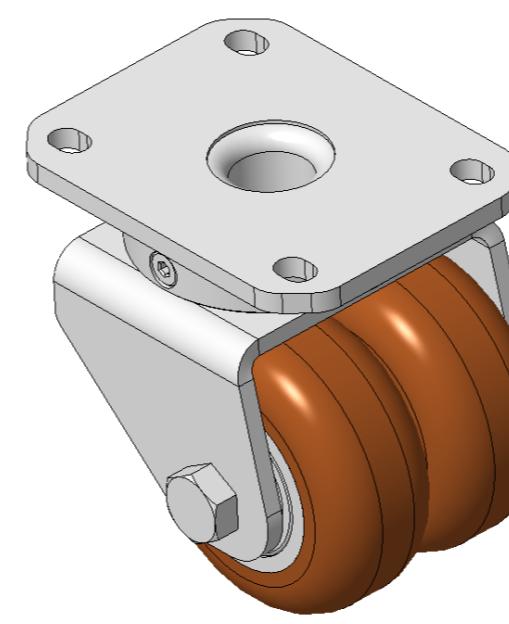

Wheel Tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 80mm |
| Wheel Width | 73mm |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 110 x 85mm |
| Bolt Hole Spacing | 80 x 60mm |
| Plate Hole | 12 x 9mm |
| Offset | 23mm |
| Swivel Interference | 145mm |
| Overall Height | 110mm |
| Swivel Radius | 72.5mm |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 250kgs |
| Load Capacity (Static) | 375kgs |
| Temperature | -20°C to +70°C |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 2.56kgs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|---------|
| Rolling Resistance | • • • • |
| Operating Noise | • • • • |
| Floor Surface Preservation | • • • • |

Dimensions

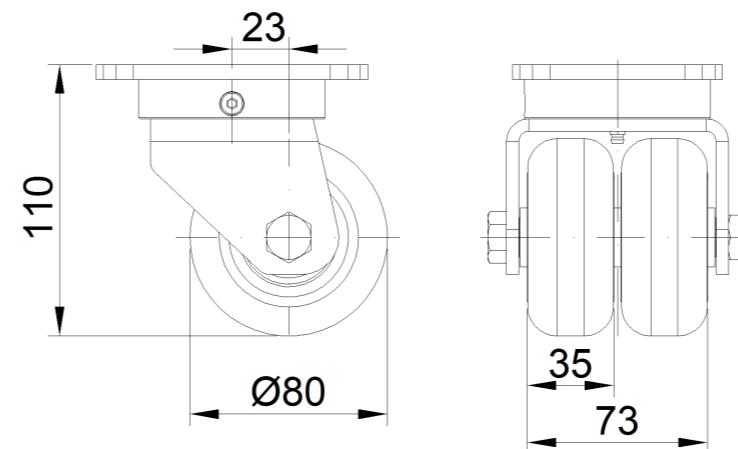

Mounting

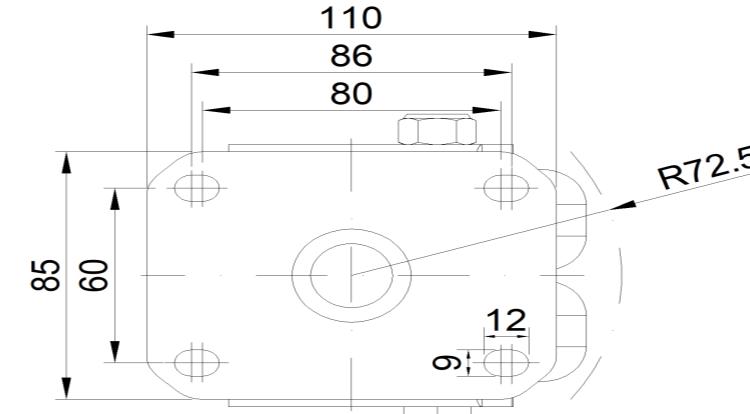

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com