

1165-5 AMR/AGV- 5 Pressed Steel Caster - Single Wheel Series
(Medium/Light Duty)

QPU (brown flat) Wheel Diameter x Wheel Width 80 x 35 mm


EAN

KS-11652305302343

Swivel Casters, Riveted and Stamping Top Plate—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing
Electroplated surface, Mounting Type - Top Plate device, 80x60mm Bolt Hole Spacing
Aluminum wheel center, High Quality Polyurethane Wheel Tread
Cast Iron brown, Bearing—Ball Bearings

Wheel Tread: High-Quality Polyurethane
Wheel Center: Iron core/cast iron

Drawings are for reference only and may differ from the product

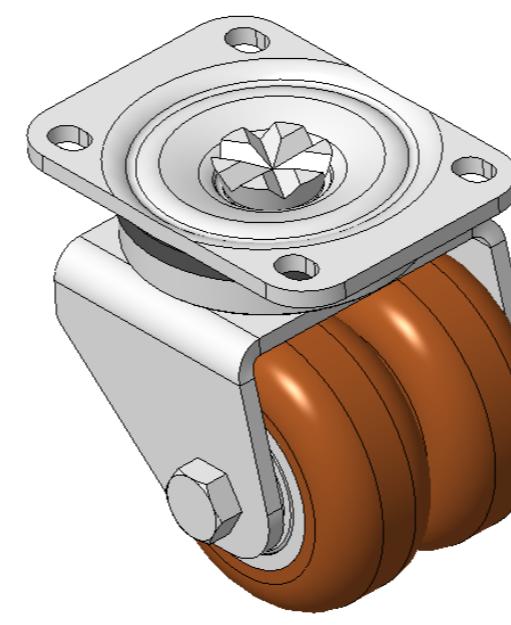

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter 3-3/16 "

Wheel Width 2-15/16

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-3/8 " x 3-3/16 "

Bolt Hole Spacing 3-3/16 " x 2-7/16 "

Plate Hole 1/2 " x 23/64 "

Offset 15/16 "

Swivel Interference 5-9/16 "

Overall Height 4-3/8 "

Swivel Radius 2-13/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.4lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance •••••


Operating Noise •••••

Floor Surface Preservation •••••

Dimensions

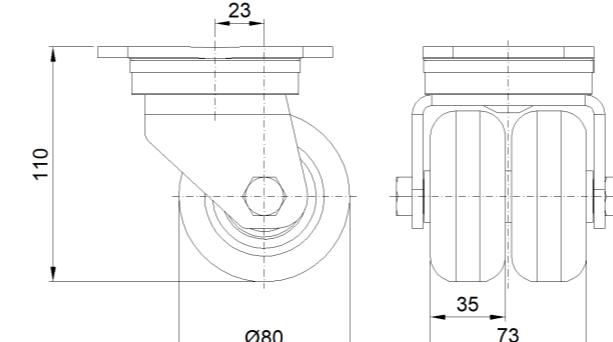

Mounting

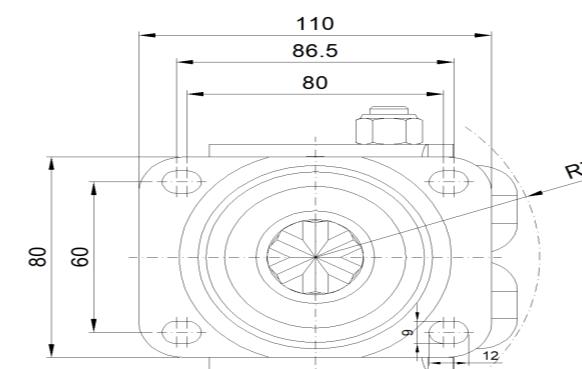

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com