

1165-5 AMR/AGV- 5 Pressed Steel Caster - Single Wheel Series (Medium/Light Duty)



QPU (brown flat) Wheel Diameter x Wheel Width 80 x 35 mm


EAN

KS-11652305305123

Swivel Caster, M20x27 thread, Fork reinforced with High-quality Impact Resistance Polypropylene. Rustproof, Corrosion resistant, Attractive appearance, Economical, and Reinforced. High-quality Impact Resistance Polypropylene Wheel Center,High-Quality Thermoplastic Rubber (TPR) tread. Brown, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

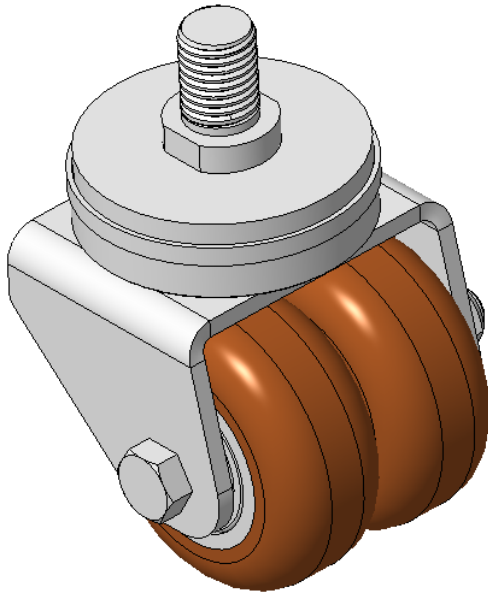

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	80mm
Wheel Width	73mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M20x27
Threaded Size	27mm
Offset	23mm
Swivel Interference	140mm
Overall Height	117.5mm
Swivel Radius	70mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.31kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

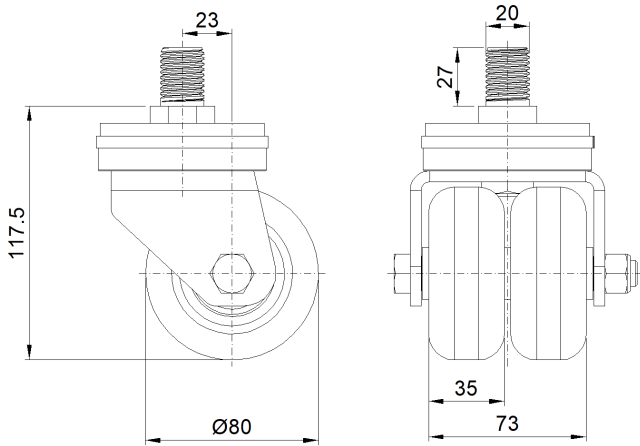

Mounting

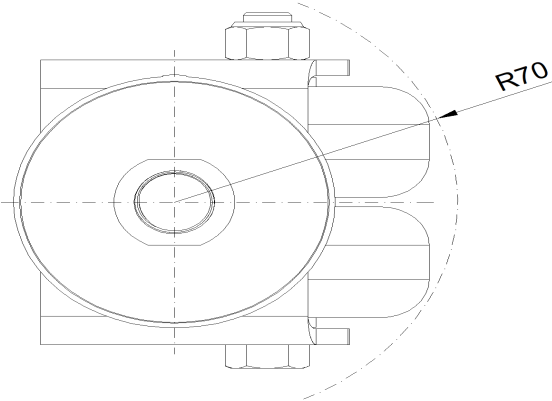

* For any deviation between metric and imperial spec, please refer to the metric spec.