

Product Data Sheet

1165-5 AMR/AGV- 5 Pressed Steel Caster - Single Wheel Series (Medium/Light Duty)



QPU (brown flat) Wheel Diameter x Wheel Width 80 x 35 mm


EAN

KS-11652305305123

Swivel Caster, M20x27 thread, Fork reinforced with High-quality Impact Resistance Polypropylene. Rustproof, Corrosion resistant, Attractive appearance, Economical, and Reinforced. High-quality Impact Resistance Polypropylene Wheel Center,High-Quality Thermoplastic Rubber (TPR) tread. Brown, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

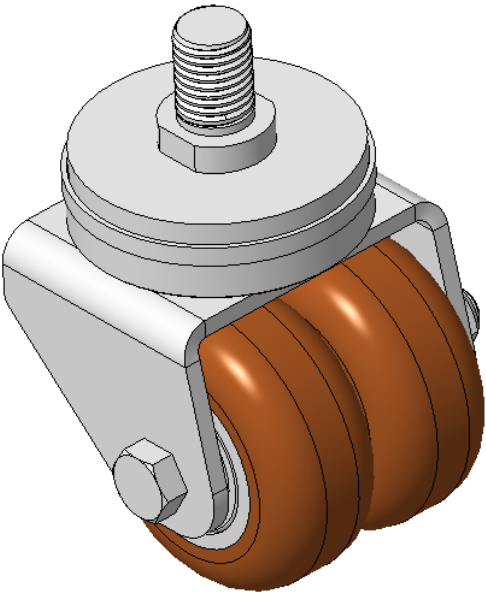

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3-3/16 "
Wheel Width	2-15/16
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M20x27
Threaded Size	1-1/16 "
Offset	15/16 "
Swivel Interference	5-9/16 "
Overall Height	4-11/16 "
Swivel Radius	2-13/16 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	198lbs
Load Capacity (Static)	298lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	5.1lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

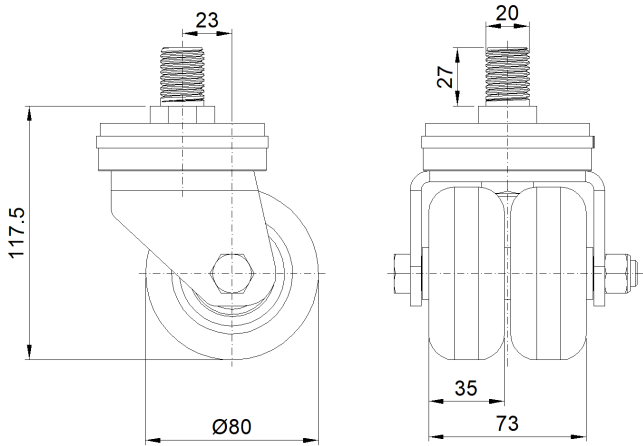

Mounting

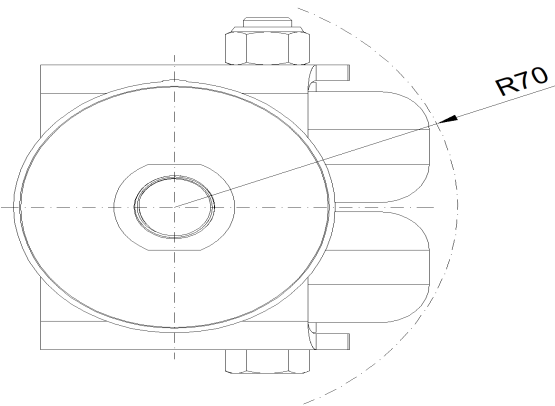

* For any deviation between metric and imperial spec, please refer to the metric spec.