

1165-2 Heavy Duty AMR/AGV-2 Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 32.5 x 15mm


EAN

KS-11655102802013

Actual Casters, Welded Caster Fork, Zinc-Plated finish
 Base plate Mounting Type, 42.5x42.5mm Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
 Bearings—specially designed precision balls to reduce Rolling Resistance
 ZQPU dual wheels, Ergonomic design designed for easier starting and turning.

Wheel tread: Made of high-quality polyurethane
 Wheel Center: Iron core/cast iron

Drawings are for reference only and may differ from the product

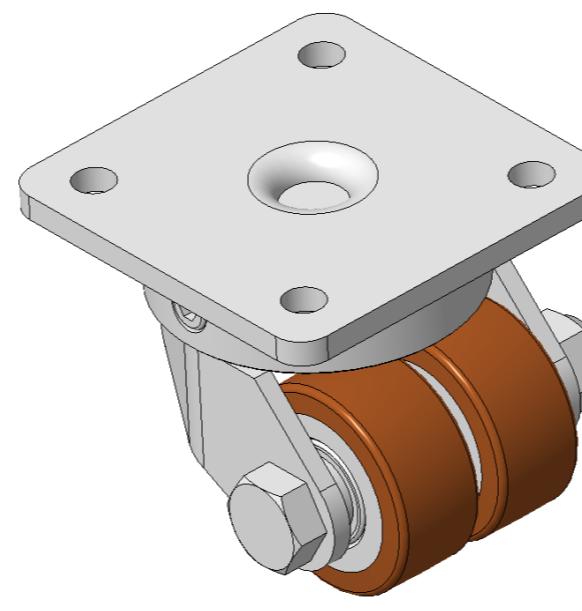

Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial
Wheel Diameter 32.5mm
Wheel Width 15mm
Wheel Bearing Wheels With Ball Bearings
Plate Size 60 x 60mm
Bolt Hole Spacing 42.5x42.5mm
Plate Hole 6.5mm
Offset 18mm
Swivel Interference 84mm
Overall Height 52mm
Swivel Radius 42mm
Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 70kgs
Load Capacity (Static) 105kgs
Temperature -20°C to +70°C
Fork Type Swivel Caster
Stainless N/A
Electrical Conductivity N/A
Anti-Static N/A
Weight 0.45kgs
Standard ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

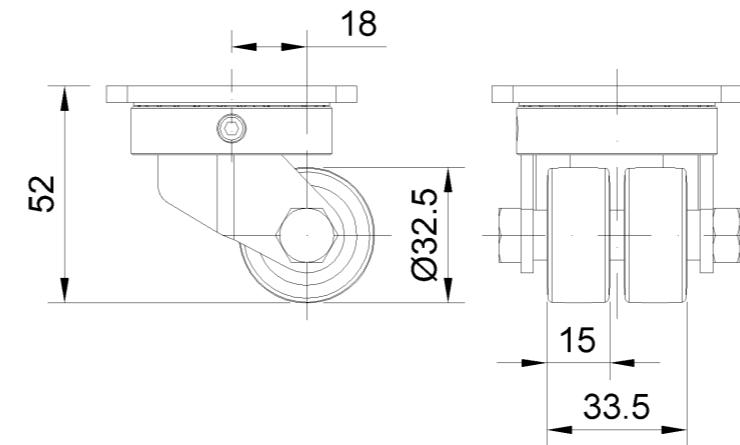

Mounting

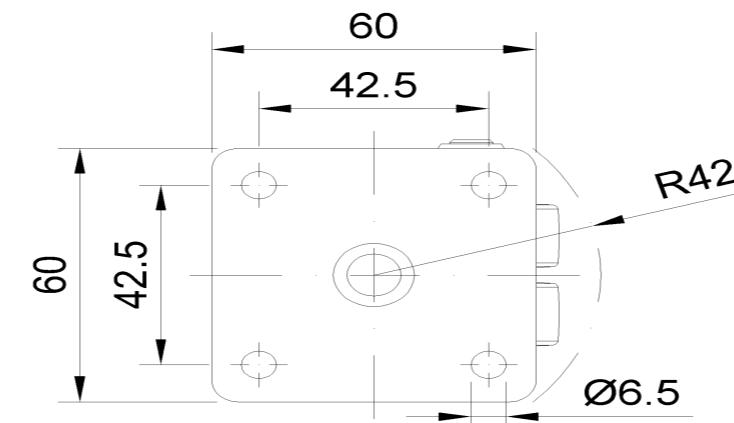

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com