

1165-2 Heavy Duty AMR/AGV-2 Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 32.5 x 15mm


EAN

KS-11655102802013

Actual Casters, Welded Caster Fork, Zinc-Plated finish
 Base plate Mounting Type, 42.5x42.5mm Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
 Bearings—specially designed precision balls to reduce Rolling Resistance
 ZQPU dual wheels, Ergonomic design designed for easier starting and turning.

Wheel tread: Made of high-quality polyurethane
 Wheel Center: Iron core/cast iron

Drawings are for reference only and may differ from the product

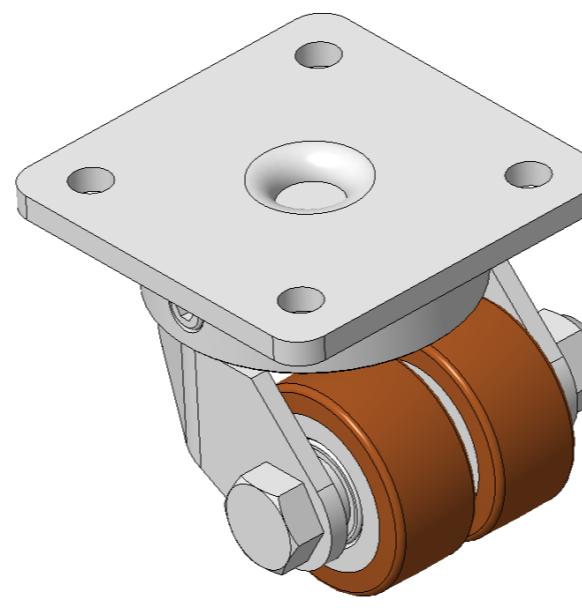

Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric	
Wheel Diameter	32.5mm
Wheel Width	6 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	2-7/16 " x 2-7/16 "
Bolt Hole Spacing	1-11/16" x 1-11/16"
Plate Hole	1/4 "
Offset	3/4 "
Swivel Interference	3-3/8 "
Overall Height	1-15/16 "
Swivel Radius	1-11/16 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	154lbs
Load Capacity (Static)	231lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.0lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

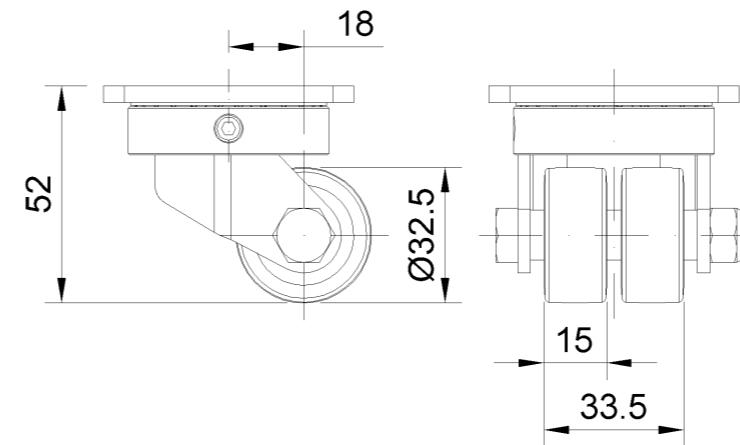

Mounting

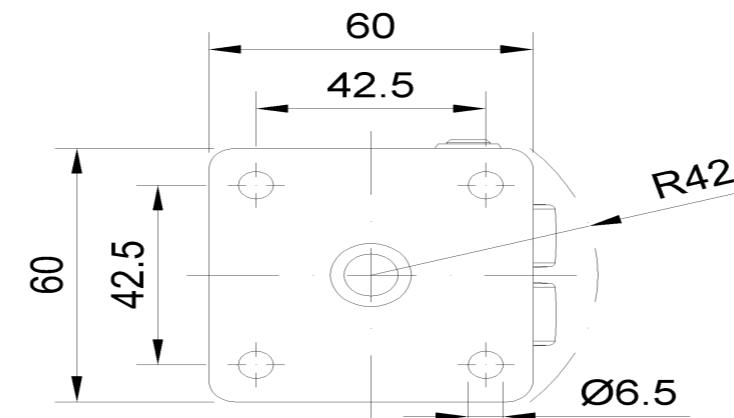

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com