

## 1165-2 Heavy Duty AMR/AGV-2 Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 32.5 x 15mm


EAN

KS-11655102802033

Actual Casters, Welded Caster Fork, Zinc-Plated finish  
Base plate Mounting Type, 73x44mm Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
Bearings—specially designed precision balls to reduce Rolling Resistance  
ZQPU dual wheels, Ergonomic design designed for easier starting and turning

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

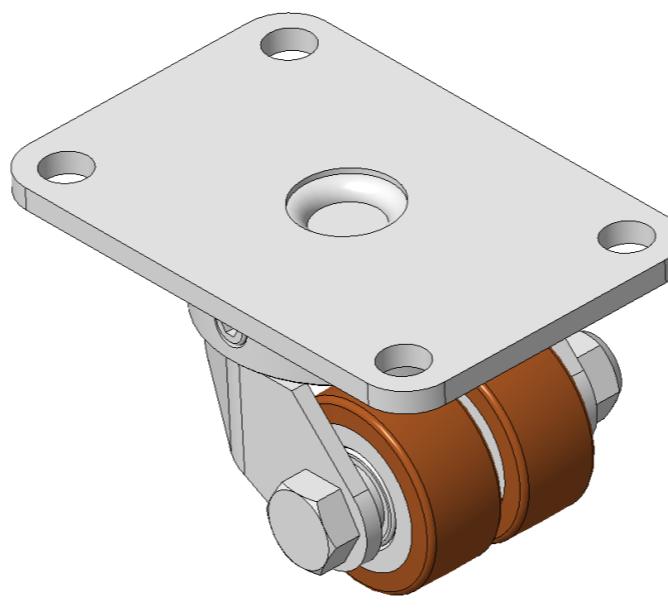

Picture may differ from original product

### Technical Data

Imperial  Metric

Wheel Diameter 32.5mm

Wheel Width 6 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-9/16 " x 2-7/16 "

Bolt Hole Spacing 2-7/8 " x 1-3/4 "

Plate Hole 3/8 "

Offset 3/4 "

Swivel Interference 4-1/8 "

Overall Height 1-15/16 "

Swivel Radius 1-15/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.1lbs

Standard ISO22883


### Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

### Dimensions

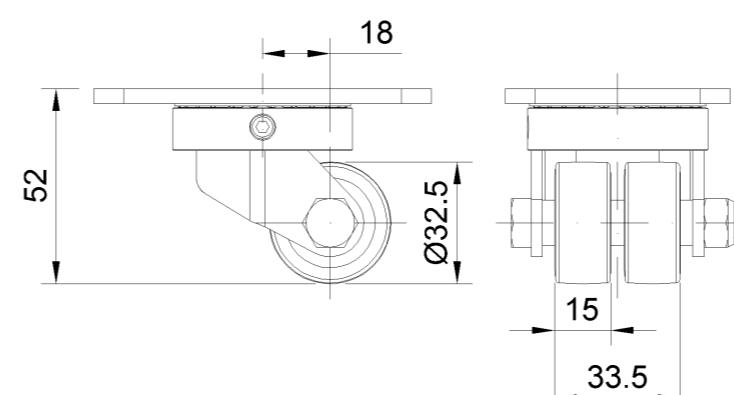

### Mounting

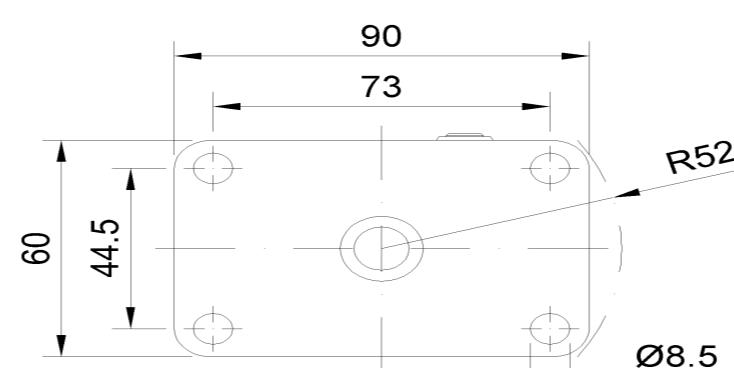

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com