

PPR Series

PPR Conductive Wheel (Dark Gray/Light Gray) Wheel Diameter×Wheel Width 50×22.5mm

EAN

KS-12021702093173

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Black/light gray, includes bearing and Dust Cap.



Wheel Tread: High-quality impact-resistant polypropylene
 Outer packaging: Thermoplastic rubber elastomer (TPR)
 Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter(D) 2 "

Wheel Width(T2) 7/8"

Wheel Bearing Ball Bearing

Axe Bore(d) 1/4 "

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 1-1/16 "

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 66lbs

Load Capacity (Static) 99lbs

Temperature -4°F to +140°F

Electrical Conductivity Y 10^3/~10^5/Q

Anti-Static N/A


Weight 0.0lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

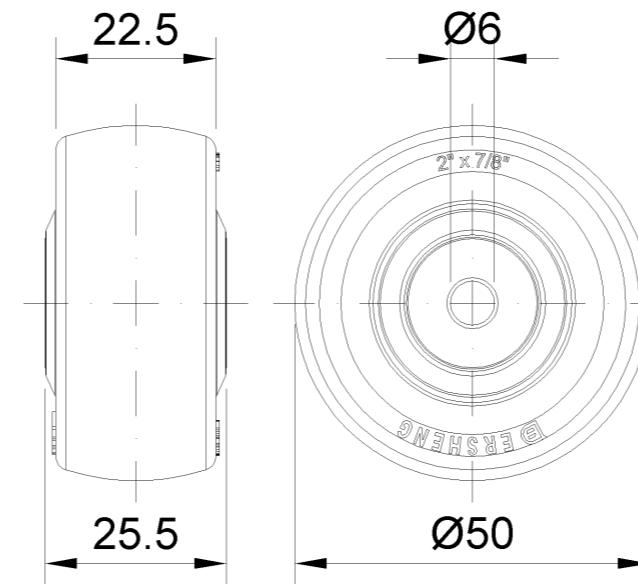

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com