

PPR Series

PPR Conductive Wheel (Black Light Gray Arc) Wheel Diameter x Wheel Width 75x31mm

EAN

KS-12021703133473

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
Color: Black/Light Gray, includes bearing and Dust Cap.



Wheel core: High-quality impact-resistant polypropylene
Wheel tread: Thermoplastic rubber elastomer (TPR)
Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter(D)	75mm
Wheel Width(T2)	31mm
Wheel Bearing	Ball Bearing
Axle Bore(d)	10mm
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Length(T1)	41mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	70kgs
Load Capacity (Static)	105kgs
Temperature	-20°C to +60°C
Electrical Conductivity	$\times 10^3/\sim 10^4/\Omega$
Anti-Static	N/A
Weight	0.14kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • ○
Operating Noise	• • • • ○
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Single Wheel

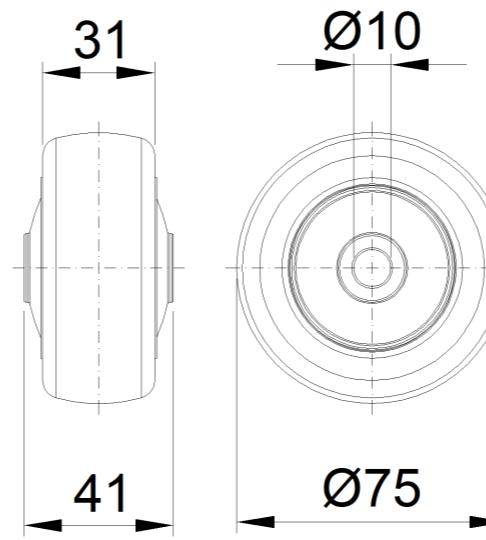

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com