

PPR Series

PPR Conductive Wheel (Black-Black Arc) Wheel Diameter x Wheel Width 100 x 31mm

A

KS-12021704133973

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Black, includes bearing and Dust Cap.



Wheel Tread: High-quality impact-resistant polypropylene
 Outer packaging: Thermoplastic rubber elastomer (TPR)
 Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter(D) 100mm

Wheel Width(T2) 31mm

Wheel Bearing Ball Bearing

Axe Bore(d) 10mm

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 42mm

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Electrical Conductivity Y 10^3/~10^5/Q

Anti-Static N/A


Weight 0.22kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

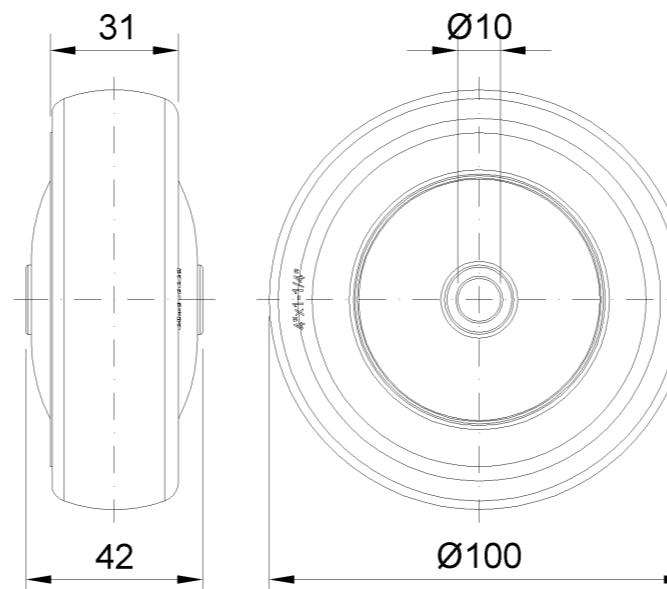

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com