

## PPR Series

PPR Conductive Wheel (Black-Black Arc) Wheel Diameter x Wheel Width 100 x 31mm

A

KS-12021704133973

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
 Color: Black, includes bearing and Dust Cap.



Wheel Tread: High-quality impact-resistant polypropylene  
 Outer packaging: Thermoplastic rubber elastomer (TPR)  
 Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter(D) 4 "

Wheel Width(T2) 1-1/4 "

Wheel Bearing Ball Bearing

Axe Bore(d) 3/8 "

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 1-11/16 "

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 176lbs

Load Capacity (Static) 265lbs

Temperature -4°F to +140°F

Electrical Conductivity Y 10^3/~10^5/Q

Anti-Static N/A


Weight 0.5lbs

Standard ISO22883

## Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

## 2D Dimensional Drawing of Single Wheel

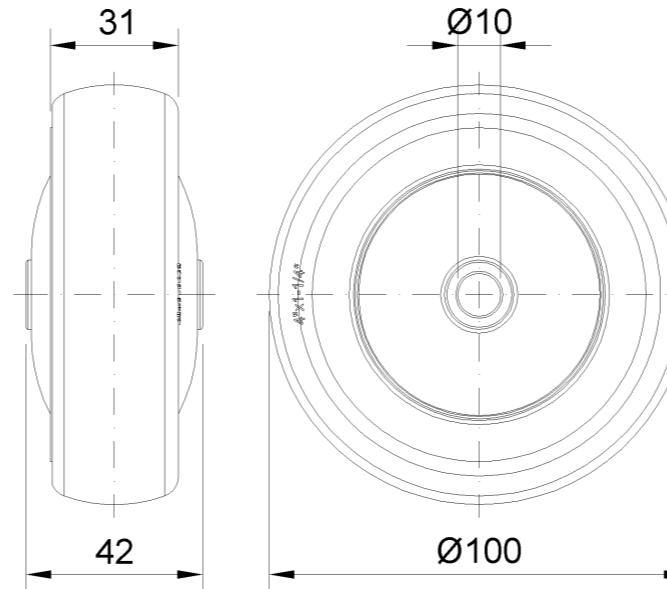

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com