

## PPR Series

PPR Wheel (Black-Black) Wheel Diameter x Wheel Width 51.5 x 20mm

EAN

KS-12022602082200

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
Color: Black



Wheel Tread: High-quality impact-resistant polypropylene  
Outer packaging: Thermoplastic rubber elastomer (TPR)  
Bearing: No center tube

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter(D)	51.5mm
Wheel Width(T2)	20mm
Wheel Bearing	Plain Bearing
Axle Bore(d)	—
Axle Bore(S)	8.2mm
Bearing Bore Depth(t)	—
Hub Length(T1)	22.3mm
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	30kgs
Load Capacity (Static)	45kgs
Temperature	-20°C to +60°C
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.03kgs
Standard	ISO22883

## Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

## 2D Dimensional Drawing of Single Wheel

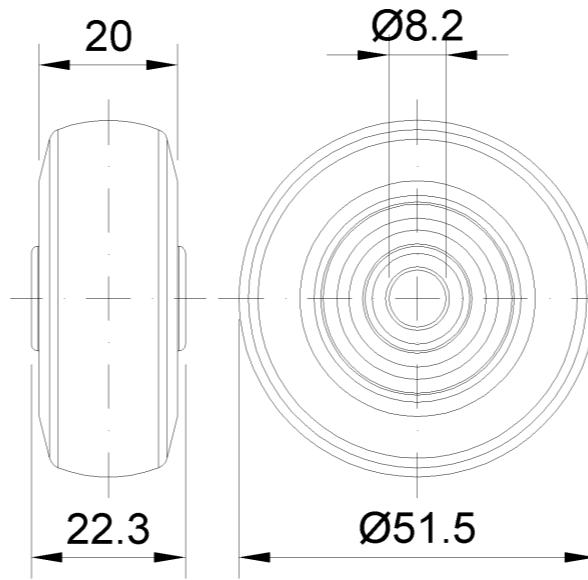

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com