



NPPR Series

NPPR Wheel (Pearlescent Green-Grey) Wheel Diameter × Wheel Width 100×23mm


EAN

KS-12022604094171

Easy to protect floors, Non-Marking, Easy To Maneuver, and capable of handling heavy loads. Low rolling and Swivel Resistance, Resistant To many other aggressive substances.. Color: Pearlescent green-gray, with Plain Bearing and Dust Cap.

Wheel core: Made of high-quality impact-resistant polypropylene
Wheel tread: Thermoplastic rubber elastomer (TPR)
Bearing: mid-tube type

Drawings are for reference only and may differ from the product

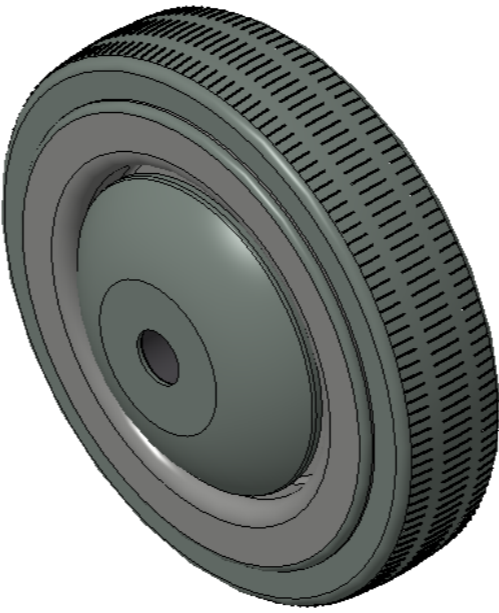

Picture may differ from original product


Technical Data

| | |
|--|----------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric | |
| Wheel Diameter(D) | 4 " |
| Wheel Width(T2) | 7/8 " |
| Wheel Bearing | Plain Bearing |
| Axle Bore(d) | 3/8 " |
| Axle Bore(S) | — |
| Bearing Bore Depth(t) | — |
| Hub Lenth(T1) | 1-5/8 " |
| Hardness Of Tread | 82±5° Shore A |
| Load Capacity (Dynamic) | 176lbs |
| Load Capacity (Static) | 265lbs |
| Temperature | -4°F to +140°F |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 2.7lbs |
| Standard | ISO22883 |

Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | ● ● ● ● ○ |
| Operating Noise | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Single Wheel

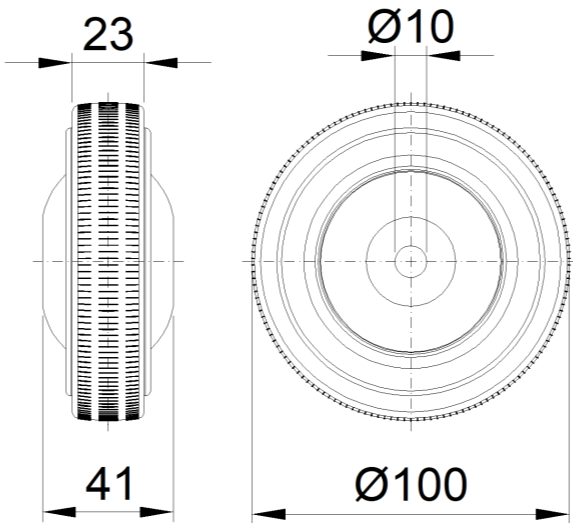

* For any deviation between metric and imperial spec, please refer to the metric spec.