

## PPR Series

PPR Wheel (Black-Black Flat) Wheel Diameter x Wheel Width 100 x 25mm

EAN

KS-12022604101100

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
Color: Black



Wheel Tread: High-quality impact-resistant polypropylene  
Outer packaging: Thermoplastic rubber elastomer (TPR)  
Bearing: No center tube

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter(D) 4 "

Wheel Width(T2) 5-1/25 "

Wheel Bearing Plain Bearing

Axe Bore(d) —

Axe Bore(S) 3/8 "

Bearing Bore Depth(t) —

Hub Lenth(T1) 1-3/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 110lbs

Load Capacity (Static) 165lbs

Temperature -4°F to +140°F

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.3lbs

Standard ISO22883

## Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

## 2D Dimensional Drawing of Single Wheel

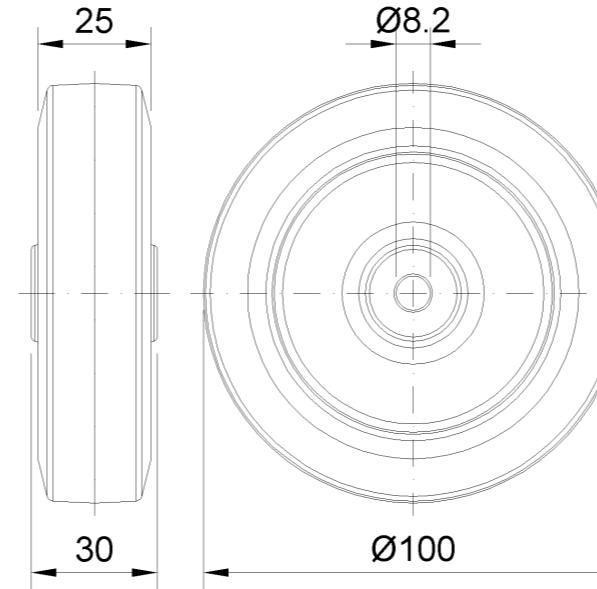

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com