

PPR Series

PPR Wheel (Middle Tube Black-Black) Wheel Diameter×Wheel Width 100×31mm

EAN

KS-12022604133873

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Black, with Dust Cap.



Wheel Tread: High-quality impact-resistant polypropylene
 Outer packaging: Thermoplastic rubber elastomer (TPR)
 Bearing: center tube

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Metric Imperial

Wheel Diameter(D) 100mm

Wheel Width(T2) 31mm

Wheel Bearing Plain Bearing

Axe Bore(d) 10mm

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 41mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.19kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

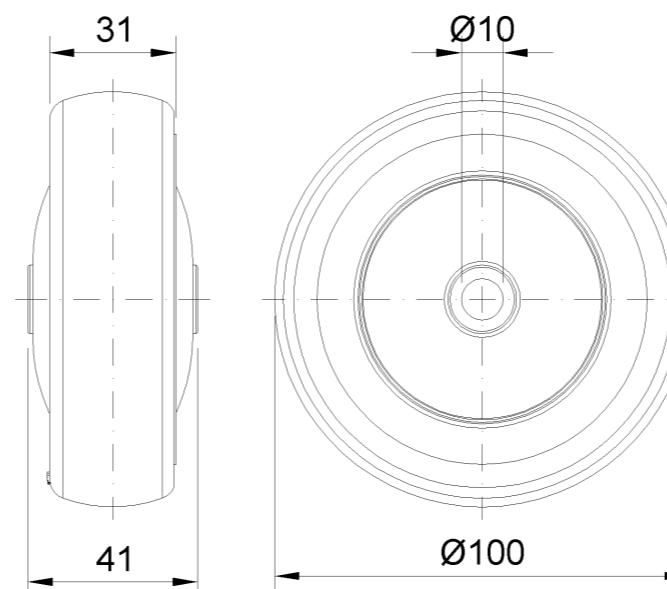

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com