

PPR Series

PPR Wheel (Black Black Flat) Wheel Diameter×Wheel Width 100×36mm

A

KS-12022604151200

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
Color: Black



Wheel Center: High-quality impact-resistant polypropylene
Outer packaging: Thermoplastic rubber elastomer (TPR)
Bearing: No center tube

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter(D)

4 "

Wheel Width(T2)

1-7/16 "

Wheel Bearing

Plain Bearing

Axe Bore(d)

—

Axe Bore(S)

3/8 "

Bearing Bore Depth(t)

—

Hub Lenth(T1)

1-9/16 "

Hardness Of Tread

82±5° Shore A

Load Capacity (Dynamic)

254lbs

Load Capacity (Static)

380lbs

Temperature

-4°F to +140°F

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

0.6lbs


Standard

ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ○
Operating Noise	● ● ● ○
Floor Surface Preservation	● ● ● ●

2D Dimensional Drawing of Single Wheel

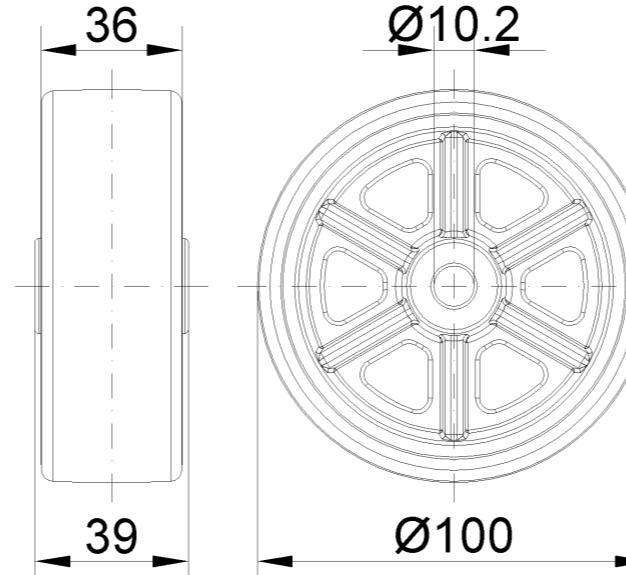

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com