

PPR Series

PPR Wheel (Middle Tube Type) (Deep Black) Wheel Diameter x Wheel Width 151 x 50mm

A

KS-12022606208971

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
Color: Black, with bearing



Wheel Tread: High-quality impact-resistant polypropylene
Outer packaging: Thermoplastic rubber elastomer (TPR)
Bearing: Long ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter(D) 151mm

Wheel Width(T2) 50mm

Wheel Bearing Annular Ball Bearing

Axle Bore(d) 30.2mm

Axle Bore(S) —

Bearing Bore Depth(t) —

Hub Length(T1) 56mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 160kgs

Load Capacity (Static) 240kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.85kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

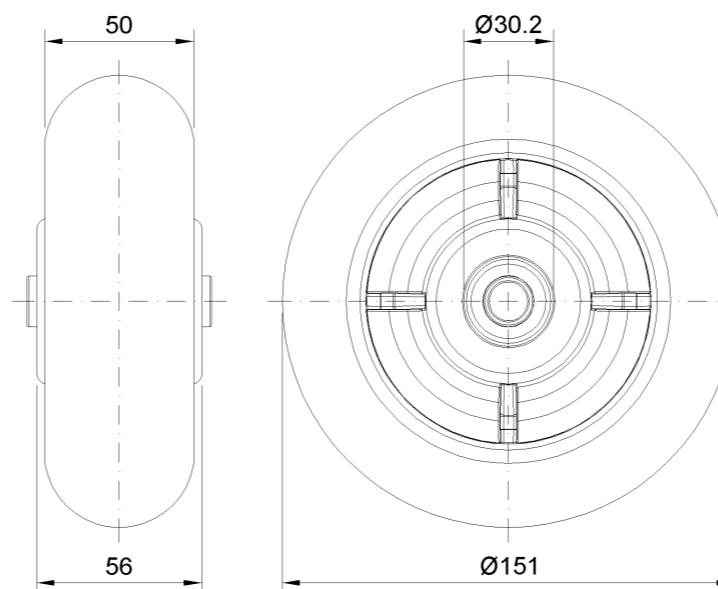

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com