



WPPR Series

WPPR Wheel (Pearlescent Light Gray) Wheel Diameter × Wheel Width 202 × 50mm

A

KS-1202260820W177

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
Color: Pearlescent light gray, includes bearings and pads.

Wheel Tread: High-quality impact-resistant polypropylene  
Outer packaging: Thermoplastic rubber elastomer (TPR)  
Bearings: Precision bearings

Drawings are for reference only and may differ from the product



Picture may differ from original product


Technical Data

|  |                |
|--|----------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                |
| Wheel Diameter(D)  | 8 "            |
| Wheel Width(T2)  | 2 "            |
|  |                |
| Wheel Bearing  | Ball Bearing   |
| Axle Bore(d)   | 9/16 "         |
| Axle Bore(S)   | —              |
| Bearing Bore Depth(t)  | —              |
| Hub Lenth(T1)  | 2-1/4 "        |
| Hardness Of Tread  | 82±5° Shore A  |
| Load Capacity (Dynamic)  | 617lbs         |
| Load Capacity (Static)   | 926lbs         |
| Temperature  | -4°F to +140°F |
| Electrical Conductivity  | N/A            |
| Anti-Static  | N/A            |
| Weight   | 3.9lbs         |
| Standard   | ISO22883       |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Single Wheel

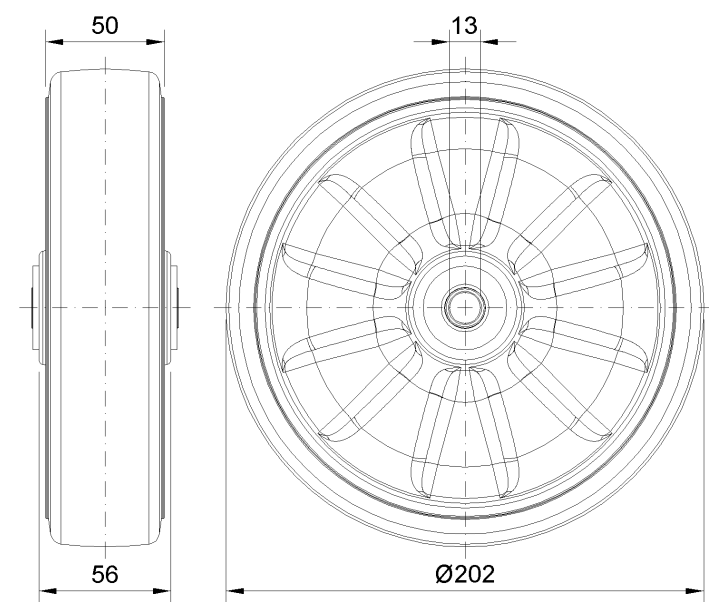

\* For any deviation between metric and imperial spec, please refer to the metric spec.