


## CPD Series

CPD Wheel Diameter x Wheel Width 100 x 32mm

D

KS-12022904151372

Impact resistant, scratch-resistant, Not Be Dyed, corrosion resistant, highly abrasion resistant, Odorless. Resistant to many chemical corrosions, Heavy Load, very low Rolling Resistance. Color: Original color

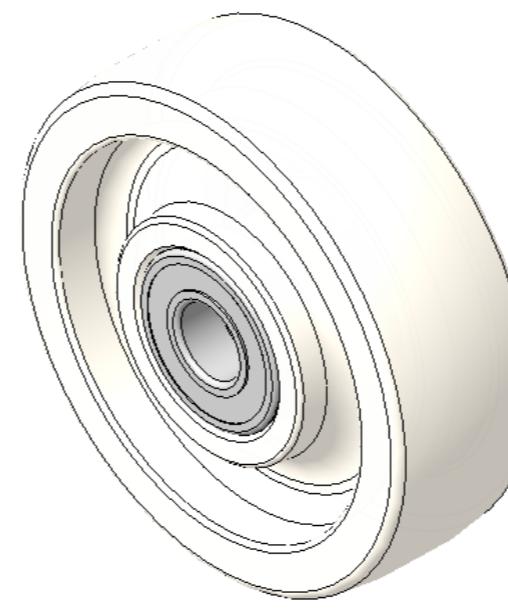

Wheel Center: Thermoplastic (PA6)

Outer packaging: Thermoplastic (PA6)

Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

 Imperial  Metric

Wheel Diameter(D) 4 "

Wheel Width(T2) 1-5/16 "

Wheel Bearing Ball Bearing

Axe Bore(d) 9/16 "

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 1-15/16 "

Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature 4°F to +140°F

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.6lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •

Operating Noise • • • ○ ○

Floor Surface Preservation • • • ○ ○

## 2D Dimensional Drawing of Single Wheel

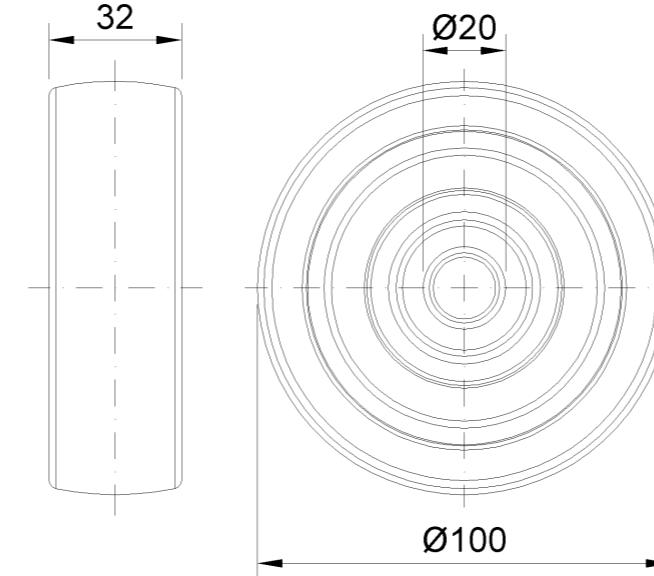

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com