

PP Series


PP Wheel (Black-Black) Wheel Diameter × Wheel Width 62.5 × 45mm

D  
KS-12022952181373

Good Heat Resistance, Rigid yet tough, fatigue-resistant, and stress-cracking resistant. Unaffected by humidity, resistant to corrosion, oil, acids, alkalis, and other solven. Odorless and recyclable, with Heavy Load and low Rolling Resistance.  
Color: Black

Wheel Center: High-quality impact-resistant polypropylene  
Wheel Tread: High-quality impact-resistant polypropylene  
Bearing: Ball bearing

Drawings are for reference only and may differ from the product

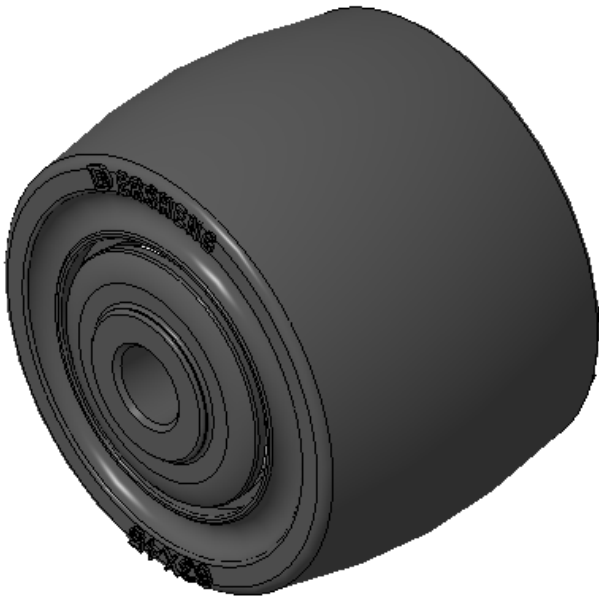

Picture may differ from original product


Technical Data

|                                                                        |                |
|------------------------------------------------------------------------|----------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                |
| Wheel Diameter(D)                                                      | 62.5mm         |
| Wheel Width(T2)                                                        | 45mm           |
| Wheel Bearing                                                          | Ball Bearing   |
| Axle Bore(d)                                                           | 10mm           |
| Axle Bore(S)                                                           | —              |
| Bearing Bore Depth(t)                                                  | —              |
| Hub Lenth(T1)                                                          | 50mm           |
| Hardness Of Tread                                                      | 65±5° Shore D  |
| Load Capacity (Dynamic)                                                | 30kgs          |
| Load Capacity (Static)                                                 | 45kgs          |
| Temperature                                                            | -10°C to +60°C |
| Electrical Conductivity                                                | N/A            |
| Anti-Static                                                            | N/A            |
| Weight                                                                 | 0.08kgs        |
| Standard                                                               | ISO22883       |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

2D Dimensional Drawing of Single Wheel

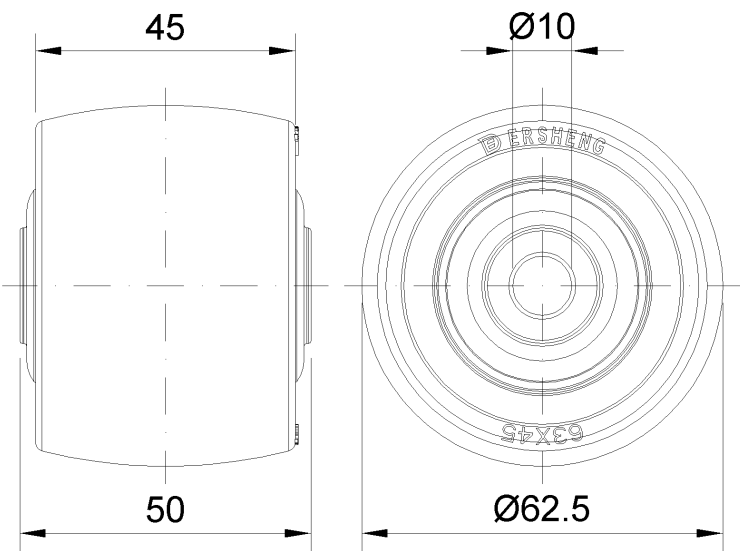

\* For any deviation between metric and imperial spec, please refer to the metric spec.