



Resolute Rubber Wheel Series

All-Purpose Wheel (Pearlescent Dark Gray, Flat) Wheel Diameter × Wheel Width
50×22mm


A

KS-12024502090300

Easy to protect floors, Non-Marking, Easy To Maneuver, and capable of handling heavy loads. Low rolling and Swivel Resistance, Resistant To many other aggressive substances.. Color: Pearlescent dark gray

Wheel Tread: High-quality impact-resistant polypropylene
Wheel Center: Thermoplastic rubber elastomer (TPR)
Bearing: —

Drawings are for reference only and may differ from the product

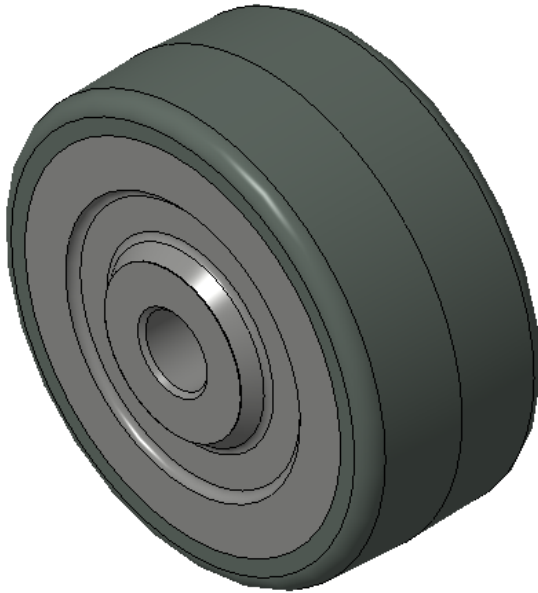

Picture may differ from original product

Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter(D)	2 "
Wheel Width(T2)	7/8 "
Wheel Bearing	Plain Bearing
Axle Bore(d)	3/8 "
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Lenth(T1)	1 "
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	123lbs
Load Capacity (Static)	185lbs
Temperature	-4°F to +140°F
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.0lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

* For any deviation between metric and imperial spec, please refer to the metric spec.