

W Resolute Wheel Series



W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm


A

KS-1202450513W671

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
Color: Pearlescent dark gray, includes bearing and Dust Cap.

Wheel Center: High-quality impact-resistant polypropylene  
Outer packaging: Thermoplastic rubber elastomer (TPR)  
Bearing: Ball bearing

Drawings are for reference only and may differ from the product

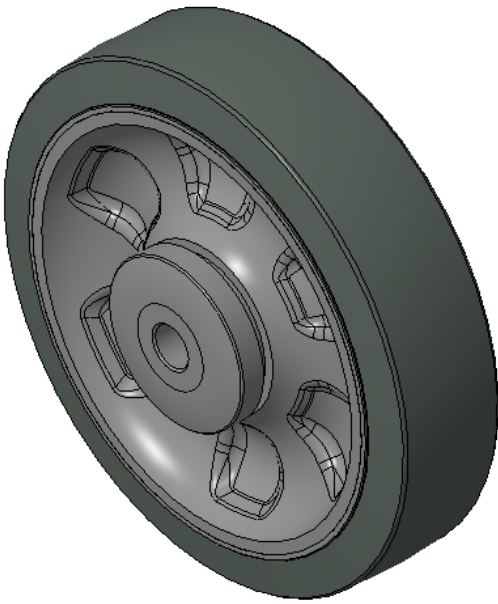

Picture may differ from original product


Technical Data

|                                                                        |                |
|------------------------------------------------------------------------|----------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                |
| Wheel Diameter(D)                                                      | 5 "            |
| Wheel Width(T2)                                                        | 1-1/4 "        |
|                                                                        |                |
| Wheel Bearing                                                          | Ball Bearing   |
| Axle Bore(d)                                                           | 3/8 "          |
| Axle Bore(S)                                                           | —              |
| Bearing Bore Depth(t)                                                  | —              |
| Hub Lenth(T1)                                                          | 1-7/8 "        |
| Hardness Of Tread                                                      | 72±5° Shore A  |
| Load Capacity (Dynamic)                                                | 324lbs         |
| Load Capacity (Static)                                                 | 486lbs         |
| Temperature                                                            | -4°F to +140°F |
| Electrical Conductivity                                                | N/A            |
| Anti-Static                                                            | N/A            |
| Weight                                                                 | 0.6lbs         |
| Standard                                                               | ISO22883       |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Single Wheel

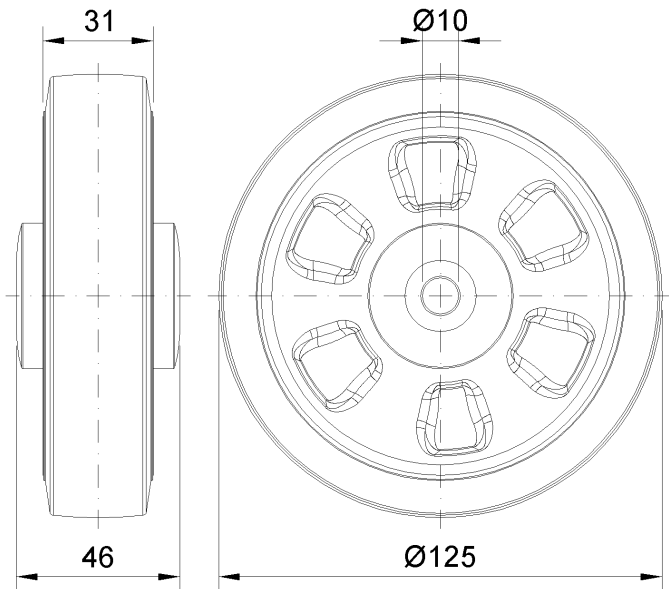

\* For any deviation between metric and imperial spec, please refer to the metric spec.