


Resolute Rubber Wheel Series

All-Effective Wheel (Light Gray) Wheel Diameter x Wheel Width 125 x 50mm

A

KS-12024505208175

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Light gray, with Telling bearing.

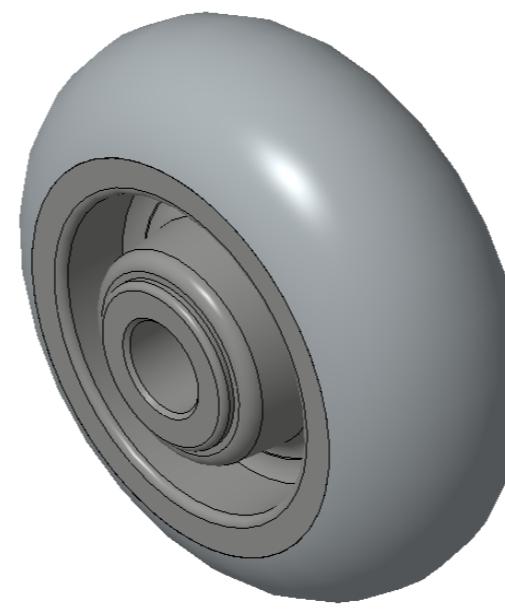

Wheel Tread: High-quality impact-resistant polypropylene
 Outer packaging: Thermoplastic rubber elastomer (TPR)
 Bearings: Telling Bearings

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter(D)	125mm
Wheel Width(T2)	50mm
Wheel Bearing	Ball Bearing
Axle Bore(d)	20.4mm
Axle Bore(S)	— mm
Bearing Bore Depth(t)	—
Hub Length(T1)	61mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	170kgs
Load Capacity (Static)	255kgs
Temperature	-20°C to +60°C
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.39kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

2D Dimensional Drawing of Single Wheel

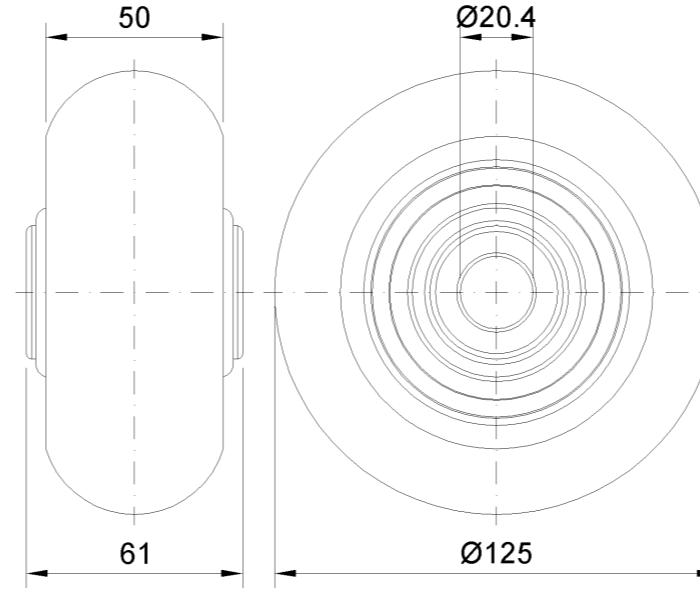

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com