



W Resolute Wheel Series

W Resolute Wheel (Pearl Dark Gray) Wheel Diameter×Wheel Width 125×50mm


A

KS-1202450520W177

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
Color: Pearlescent light gray, includes bearings and pads.

Wheel Center: High-quality impact-resistant polypropylene
Outer packaging: Thermoplastic rubber elastomer (TPR)
Bearing: Ball bearing

Drawings are for reference only and may differ from the product

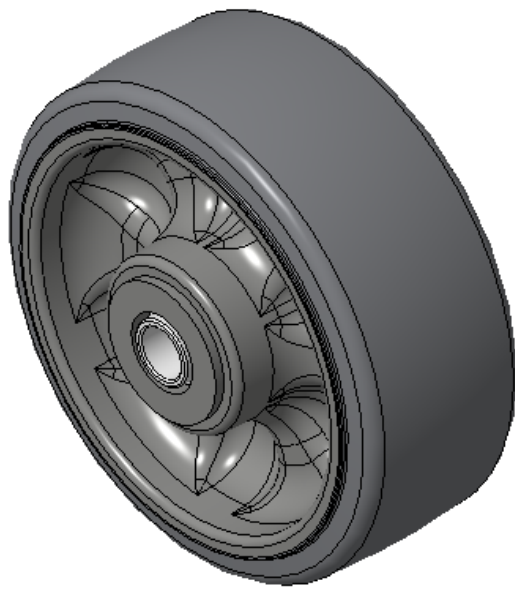

Picture may differ from original product


Technical Data

| | |
|--|----------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric | |
| Wheel Diameter(D) | 5 " |
| Wheel Width(T2) | 2 " |
| | |
| Wheel Bearing | Ball Bearing |
| Axle Bore(d) | 9/16 " |
| Axle Bore(S) | — |
| Bearing Bore Depth(t) | — |
| Hub Lenth(T1) | 2-1/2 " |
| Hardness Of Tread | 72±5° Shore A |
| Load Capacity (Dynamic) | 375lbs |
| Load Capacity (Static) | 562lbs |
| Temperature | -4°F to +140°F |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 1.1lbs |
| Standard | ISO22883 |

Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | ● ● ● ● ● |
| Operating Noise | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Single Wheel

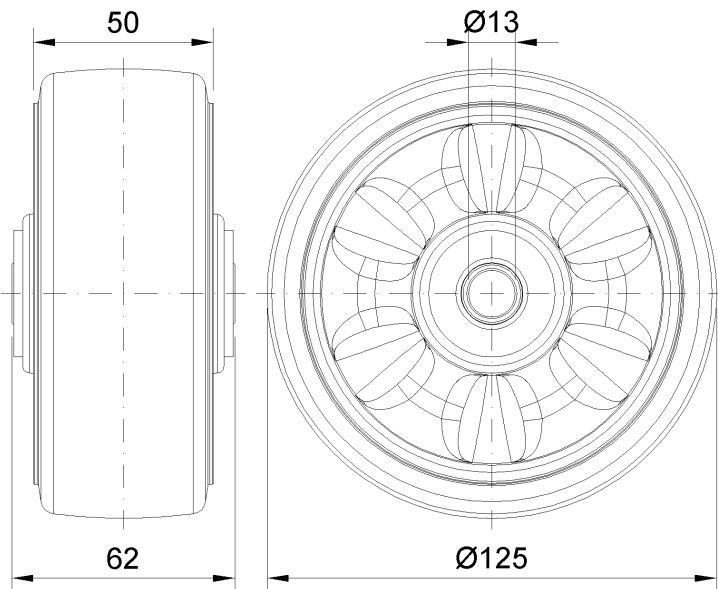

* For any deviation between metric and imperial spec, please refer to the metric spec.