



Resolute Rubber Wheel Series

Resolute Wheel Diameter × Wheel Width 151 x 50mm


A

KS-12024506208175

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
Color: Light gray, with Telling bearing.

Wheel Tread: High-quality impact-resistant polypropylene  
Outer packaging: Thermoplastic rubber elastomer (TPR)  
Bearings: Telling Bearings

Drawings are for reference only and may differ from the product

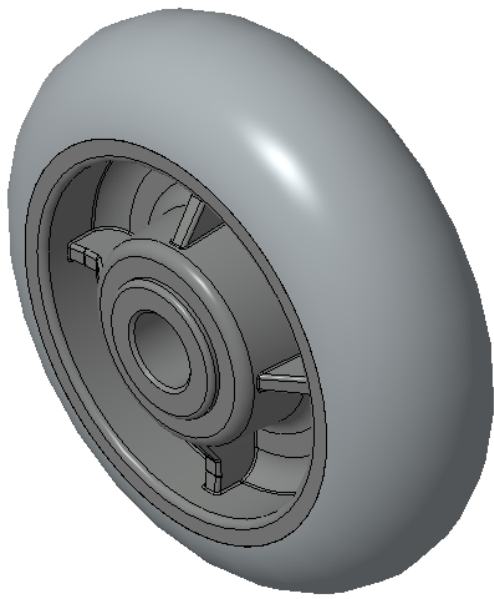

Picture may differ from original product


Technical Data

|                                                                        |                 |
|------------------------------------------------------------------------|-----------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                 |
| Wheel Diameter(D)                                                      | 150mm           |
| Wheel Width(T2)                                                        | 50mm            |
| Wheel Bearing                                                          | Without Bearing |
| Axle Bore(d)                                                           | 20.4mm          |
| Axle Bore(S)                                                           | — mm            |
| Bearing Bore Depth(t)                                                  | —               |
| Hub Lenth(T1)                                                          | 61mm            |
| Hardness Of Tread                                                      | 72±5° Shore A   |
| Load Capacity (Dynamic)                                                | 204kgs          |
| Load Capacity (Static)                                                 | 306kgs          |
| Temperature                                                            | -20°C to +60°C  |
| Electrical Conductivity                                                | N/A             |
| Anti-Static                                                            | N/A             |
| Weight                                                                 | 0.65kgs         |
| Standard                                                               | ISO22883        |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Single Wheel

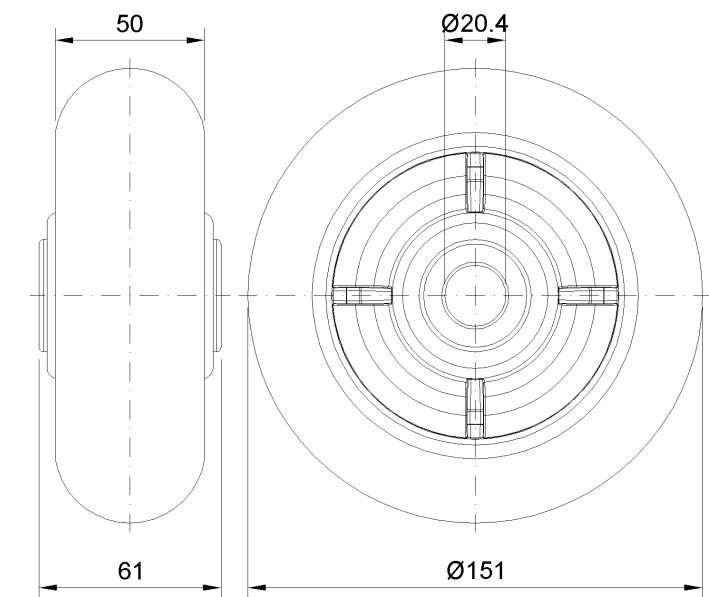

\* For any deviation between metric and imperial spec, please refer to the metric spec.