

Blue Resilient Resolute Rubber Wheel Series



Full-Effect Elastic Wheel (Black & Blue) Wheel Diameter × Wheel Width 200×48mm

EAN

KS-12024508193100

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
Color: Black/Blue, with bearings.

Wheel core: High-quality impact-resistant polypropylene  
Wheel tread: Thermoplastic rubber elastomer (TPR)  
Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product



Picture may differ from original product


Technical Data

|                                                                        |                |
|------------------------------------------------------------------------|----------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                |
| Wheel Diameter(D)                                                      | 200mm          |
| Wheel Width(T2)                                                        | 48mm           |
| Wheel Bearing                                                          | Ball Bearing   |
| Axle Bore(d)                                                           | 20mm           |
| Axle Bore(S)                                                           | —              |
| Bearing Bore Depth(t)                                                  | —              |
| Hub Lenth(T1)                                                          | 58mm           |
| Hardness Of Tread                                                      | 72±5° Shore A  |
| Load Capacity (Dynamic)                                                | 325kgs         |
| Load Capacity (Static)                                                 | 487.5kgs       |
| Temperature                                                            | -20°C to +60°C |
| Electrical Conductivity                                                | N/A            |
| Anti-Static                                                            | N/A            |
| Weight                                                                 | 0.98kgs        |
| Standard                                                               | ISO22883       |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Single Wheel

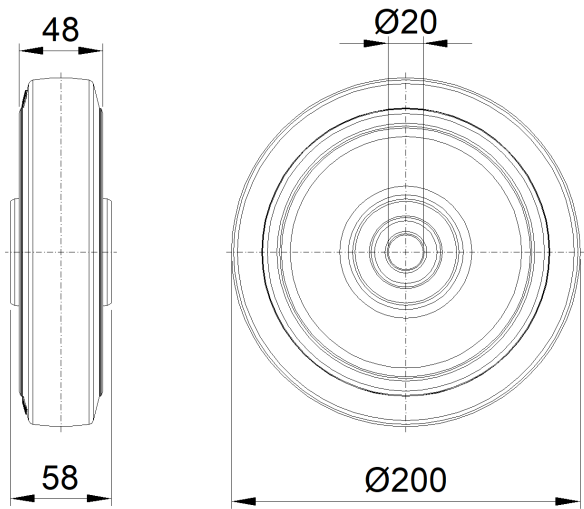

\* For any deviation between metric and imperial spec, please refer to the metric spec.