

Blue Resilient Resolute Rubber Wheel Series



Full-Effect Elastic Wheel (Gray & Gray) Wheel Diameter x Wheel Width 200x48mm

EAN

KS-12024508193200

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Grayish-gray, with bearing.



Picture may differ from original product

Drawings are for reference only and may differ from the product

Technical Data

 Metric Imperial

Wheel Diameter(D) 200mm

Wheel Width(T2) 48mm

Wheel Bearing Ball Bearing

Axe Bore(d) 20mm

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 58mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 325kgs

Load Capacity (Static) 487.5kgs

Temperature -20°C to +60°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.98kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •

Operating Noise • • • •

Floor Surface Preservation • • • •

2D Dimensional Drawing of Single Wheel

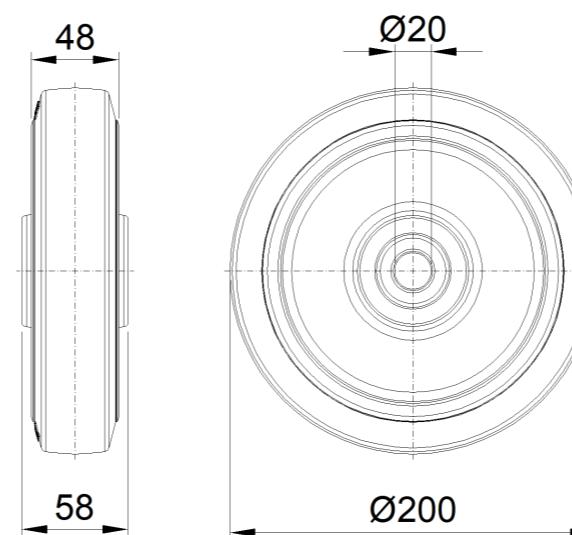

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com