



Blue Resilient Resolute Rubber Wheel Series

Full-Effect Elastic Wheel (Gray & Gray) Wheel Diameter × Wheel Width 200×48mm

EAN

KS-12024508193200

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
Color: Grayish-gray, with bearing.

Wheel core: Made of high-quality impact-resistant polypropylene
Wheel tread: Thermoplastic rubber elastomer (TPR)
Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product



Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter(D)	8 "
Wheel Width(T2)	1-15/16 "
Wheel Bearing	Ball Bearing
Axle Bore(d)	13/16 "
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Lenth(T1)	2-5/16 "
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	717lbs
Load Capacity (Static)	1075lbs
Temperature	-4°F to +140°F
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.2lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

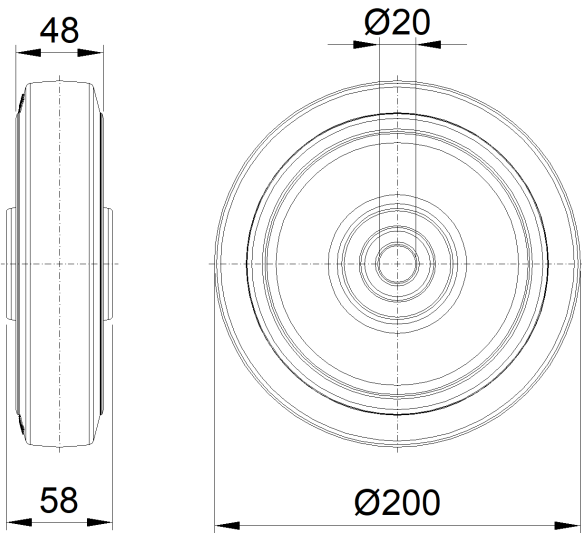

* For any deviation between metric and imperial spec, please refer to the metric spec.