

## W Resolute Wheel Series

W All-Effective Wheel (Pearlescent Light Gray) Wheel Diameter x Wheel Width 202 x 50mm

A

KS-1202450820W172

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.  
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.  
Color: Pearlescent light gray, includes bearings and tubing gaskets.



Wheel Tread: High-quality impact-resistant polypropylene  
Outer packaging: Thermoplastic rubber elastomer (TPR)  
Bearing: Long ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

### Technical Data

Imperial  Metric

Wheel Diameter(D) 8 "

Wheel Width(T2) 2 "

Wheel Bearing Annular Ball Bearing

Axle Bore(d) 1/2 "

Axle Bore(S) —

Bearing Bore Depth(t) —

Hub Length(T1) 2-1/4 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 675lbs

Load Capacity (Static) 1012lbs

Temperature -4°F to +140°F

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.0lbs

Standard ISO22883


### Advantages at a glance

Rolling Resistance • • • •

Operating Noise • • • •

Floor Surface Preservation • • • •

### 2D Dimensional Drawing of Single Wheel

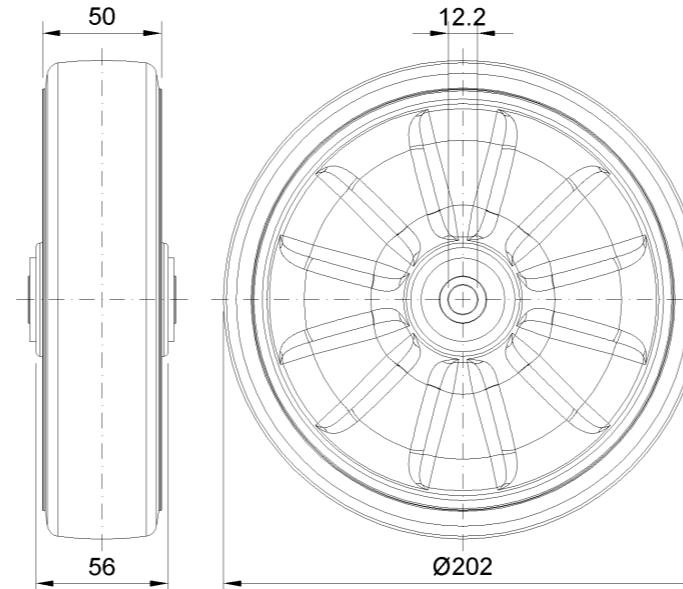

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com