

Blue Resilient Resolute Rubber Wheel Series

Full-Effect Elastic Wheel (Black-Blue) Wheel Diameter x Wheel Width 80 x 32mm

A

KS-12024523133200

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
Color: Blackish-blue



Wheel Center: High-quality impact-resistant polypropylene
Outer packaging: Thermoplastic rubber elastomer (TPR)
Bearing: No center tube

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter(D) 3-3/16 "

Wheel Width(T2) 6-11/32 "

Wheel Bearing Plain Bearing

Axle Bore(d) —

Axle Bore(S) 1/2 "

Bearing Bore Depth(t) —

Hub Length(T1) 1-3/4 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 265lbs

Load Capacity (Static) 397lbs

Temperature -4°F to +140°F

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.2lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

2D Dimensional Drawing of Single Wheel

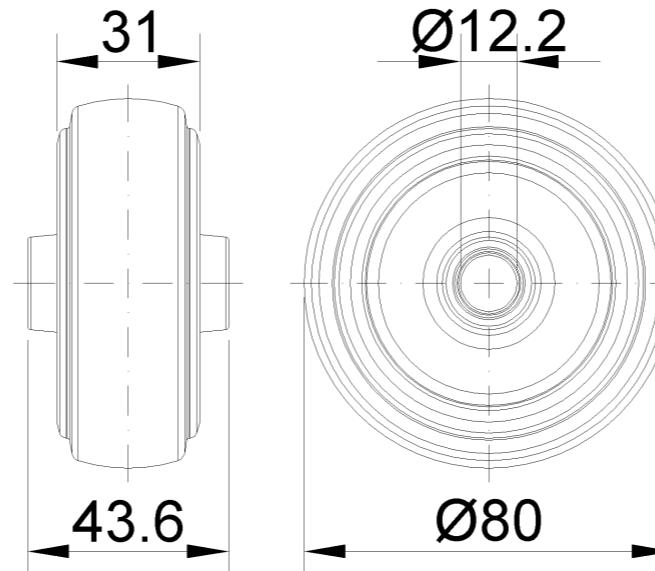

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com