

HDR & WHDR Series

HDR Wheel (Black) Wheel Diameter×Wheel Width 75×31mm

EAN

KS-12025003133973

Easy to Floor Surface Preservation, Non-Markings, Easy To Maneuver, and can withstand heavy loads.
 Low rolling and Swivel Resistance, resistant to corrosion from many corrosive substances.
 Color: Black, includes bearing and Dust Cap.



Wheel core: High-quality impact-resistant polypropylene
 Wheel tread: Thermoplastic rubber elastomer (TPR)
 Bearing: Precision ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter(D) 3 "

Wheel Width(T2) 1-1/4 "

Wheel Bearing Ball Bearing

Axe Bore(d) 3/8 "

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 1-5/8 "

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.3lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • ○ ○
Floor Surface Preservation	• • • ○ ○

2D Dimensional Drawing of Single Wheel

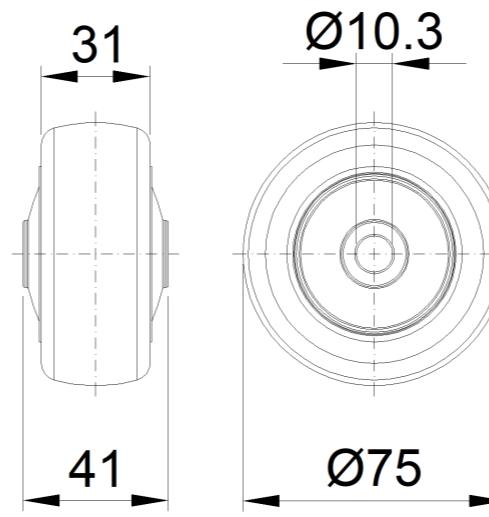

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com